



Intel® Server M50FCP Family

Configuration Guide

A reference document used to identify available server building blocks, integrated server systems, accessories, and spare parts associated with the Intel® Server M50FCP Family.

Rev. 1.0.1

January 2023



M50FCP

Delivering Breakthrough Data Center System Innovation – Experience What's Inside!

<This page is intentionally left blank>

Document Revision History

Date	Revision	Changes
December 2022	1.0 - NDA	Production release - NDA
January 2023	1.0.1	Production release - Public

Disclaimers

Intel technologies' features and benefits depend on system configuration and may require enabled hardware, software, or service activation. Performance varies depending on system configuration. No computer system can be absolutely secure. Check with your system manufacturer or retailer or learn more at intel.com.

You may not use or facilitate the use of this document in connection with any infringement or other legal analysis concerning Intel products described herein. You agree to grant Intel a non-exclusive, royalty-free license to any patent claim thereafter drafted which includes subject matter disclosed herein.

No license (express or implied, by estoppel or otherwise) to any intellectual property rights is granted by this document.

The products described may contain design defects or errors known as errata, which may cause the product to deviate from published specifications. Current characterized errata are available on request.

Intel disclaims all express and implied warranties, including without limitation, the implied warranties of merchantability, fitness for a particular purpose, and non-infringement, as well as any warranty arising from course of performance, course of dealing, or usage in trade.

Copies of documents that have an order number and are referenced in this document may be obtained by calling 1-800-548-4725 or by visiting www.intel.com/design/literature.htm.

Intel, Intel Optane, Xeon, and the Intel logo are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

*Other names and brands may be claimed as the property of others.

© Intel Corporation

Table of Contents

1. Product Overview	11
1.1 Processor Support	12
1.2 Memory Support	13
1.3 System Configuration Notes	15
1.4 Reference Documents and Support Collaterals	16
1.5 Intel® Server Board M50FCP2SBSTD	18
1.6 Intel® Server System M50FCP1UR	23
1.7 Intel® Server System M50FCP2UR	29
1.8 Available Server Board, Chassis, and System SKU Summary	36
2. Server Building Block Options	37
2.1 Intel® Server Board M50FCP2SBSTD	38
3. Server System Configurations	39
3.1 Intel® Server System M50FCP1UR – 1U Rack Mount System	40
3.2 Intel® Server System M50FCP2UR – 2U Rack Mount System	43
4. Front Drive Bay – Drive Interface Data Cable Guide	46
4.1 Data Cable Connector Types	47
4.2 1U / 2U Server System SAS / SATA / NVMe* Cable Kits	49
4.2.1 Cable Kit Product Code Decoder Examples	50
4.2.2 Cable Kit Order Information	51
4.2.3 Cable Recommendations	56
4.3 1U 4 x 2.5" – M50FCP1UR204 SAS /SATA / NVMe* Data Cable Guide	57
4.4 1U 12 x 2.5" – M50FCP1UR212 SAS / SATA / NVMe* Data Cable Guide	58
4.5 2U 2.5" Front Mount Drive Bay Cable Guide	59
4.5.1 M50FCP2UR208 SAS / SATA / NVMe* Data Cable Guide for up to 8 Front Drive Bays	59
4.5.2 M50FCP2UR 16 x 2.5" SAS / SATA / NVMe* Data Cable Guide	60
4.5.3 M50FCP2UR 24 x 2.5" SAS / SATA / NVMe* Data Cable Guide	62
4.6 2U 12 x 3.5" – M50FCP2UR312 SAS / SATA / NVMe* Data Cable Guide	64
5. 1U / 2U System Optional Accessories	65
5.1 Riser Card Accessories and Spares for 1U Systems	65

5.2	Riser Card Accessories and Spares for 2U Systems	67
5.3	Intel® Ethernet Network Adapters for OCP*	72
5.4	Intel® RAID Add-In Cards, Modules, and Accessories	77
5.4.1	Intel® RAID Controller Add-In Cards	77
5.4.2	Miscellaneous Intel® RAID Accessory Options	79
5.5	Power Supply Unit Options and Power Cable Kits	80
5.6	1U / 2U Rack Mount Kits	82
6.	Miscellaneous Accessory Options	84
7.	1U / 2U Spare and Replacement Parts (FRUs)	89
Appendix A.	Glossary	95

List of Figures

Figure 1. Intel® Server M50FCP Family Overview	11
Figure 2. 4 th Gen Intel® Xeon® Scalable Processor Identification.....	12
Figure 3. Intel® Server Board M50FCP2SBSTD Component / Feature Identification.....	18
Figure 4. Intel® Server System M50FCP1UR Components Overview.....	23
Figure 5. 4 x 2.5" Front Drive Bay Configuration – iPC M50FCP1UR204.....	24
Figure 6. 12 x 2.5" Front Drive Bay Configuration – iPC M50FCP1UR212.....	24
Figure 7. Back Panel Feature Identification.....	24
Figure 8. Intel® Server System M50FCP2UR Feature Set Identification.....	29
Figure 9. 2U 8 x 2.5" Front Drive Bay Configuration – iPC M50FCP2UR208	30
Figure 10. 2U 16 x 2.5" Front Drive Bay Configuration (based on M50FCP2UR208 with accessory options) ..	30
Figure 11. 2U 24 x 2.5" Front Drive Bay Configuration (based on M50FCP2UR208 with accessory options) ..	30
Figure 12. 2U 12 x 3.5" Front Drive Bay Configuration – iPC M50FCP2UR312	31
Figure 13. 2U Back Panel Feature Identification.....	31
Figure 14. Intel Server Building Block Options.....	37
Figure 15. L6 Integrated System Options	39
Figure 17. 2U 8 x 2.5" SAS / SATA / NVMe* Hot-Swap Backplane – Back Side.....	46
Figure 18. 2U 12 x 3.5" HSBP Connector Identification – Back Side.....	46
Figure 19. 1U 4 x 2.5" SAS / SATA / NVMe* Hot Swap Backplane – Back Side.....	47
Figure 20. 1U 12 x 2.5" SAS / SATA / NVMe* Hot Swap Backplane – Back Side.....	47
Figure 21. Server System Cable Routing.....	56
Figure 22. 4 x 2.5" Front Drive Bay Configuration – M50FCP1UR204.....	57
Figure 23. 12 x 2.5" Front Drive Bay Configuration – M50FCP1UR212	58
Figure 24. 2U 8 x 2.5" Front Drive Bay Configuration – M50FCP2UR208.....	59
Figure 25. 2U 16 x 2.5" Front Drive Bay Configuration.....	60
Figure 26. 2U 24 x 2.5" M50FCP2UR208 Front Drive Bay Configuration	62
Figure 27. 2U 2.5" x 24 System HSBP Enumeration	62
Figure 28. 2U 12 x 3.5" M50FCP2UR312 Front Drive Bay Configuration	64
Figure 29. Intel® Ethernet Network Adapter Placement.....	72
Figure 30. OCP* Module Bay Filler Removal (2U System Shown)	73

Figure 31. OCP* Module with Pull Tab Installation (2U System Shown) 73

List of Tables

Table 1. 4 th Gen Intel® Xeon® Scalable Processor Family Feature Comparison.....	13
Table 2. DDR5 DIMM Attributes Table for “Identical” and “Like” DIMMs.....	14
Table 3. Product Family Reference Collaterals.....	16
Table 4. Intel® Server Board M50FCP2SBSTD Features.....	19
Table 5. Intel® Server System M50FCP1UR Features.....	25
Table 6. Intel® Server System M50FCP2UR Features.....	32
Table 7. Server Board (L3) Family Summary.....	36
Table 8. Server System (L6 BIK) Family Summary.....	36
Table 9. Intel® Server Board M50FCP2SBSTD.....	38
Table 10. Intel® Server System M50FCP1UR204 Specifications and Configuration Requirements.....	41
Table 11. Intel® Server System M50FCP1UR212 Specifications and Configuration Requirements.....	42
Table 12. Intel® Server System M50FCP2UR208 Specifications and Configuration Requirements.....	44
Table 13. Intel® Server System M50FCP2UR312 Product Specifications and Configuration Requirements....	45
Table 14. Multiport Mini-SAS HD Interface Connectors.....	47
Table 15. x4 PCIe* SlimSAS* Interface Connectors.....	48
Table 16. x4 PCIe* MCIO Interface Connectors.....	48
Table 17. x8 PCIe* Interface Connectors.....	48
Table 18. Data Cable Connector Identification.....	49
Table 19. SAS/SATA/NVMe* Data Cable Kit Description and Order Information.....	51
Table 20. Data Cable Guide for Intel® Server System M50FCP1UR204.....	57
Table 21. Data Cable Guide for Intel® Server System M50FCP1UR212.....	58
Table 22. M50FCP2UR208 Cable Guide for up to 8 Front Drive Bays.....	60
Table 23. 2U 2.5” SAS/SATA Cable Guide for 16 Front Drive Bay Configuration.....	61
Table 24. 2U 2.5” PCIe* NVMe* Cable Guide for 16 Front Drive Bays.....	61
Table 25. 2U 2.5” SAS / SATA / NVMe* Cable Guide for 24 Front Drive Bays.....	63
Table 26. 2U 12 x 3.5” M50FCP2UR312 SAS / SATA / NVMe* Cable Guide.....	64
Table 27. Riser Card Accessories and Spares for 1U Systems.....	65
Table 28. Riser Card Accessories and Spares for 2U Systems.....	67
Table 29. Intel® Ethernet Network Adapters for OCP*.....	74

Table 30. Intel® RAID Controller Add-In Cards – SAS 3.0 (12 Gb/s) and NVMe* PCIe* 4.0	77
Table 31. Intel® RAID Accessory Options	79
Table 32. Power Supply Modules and Power Cords	80
Table 33. Rack Mount Kits	82
Table 34. Miscellaneous Accessory Options	84
Table 35. Spare and Replacement Parts	89

1. Product Overview

This document provides a catalog of available Intel server products, accessories, and spares for the Intel® Server M50FCP Family.

Intel® Server M50FCP Family

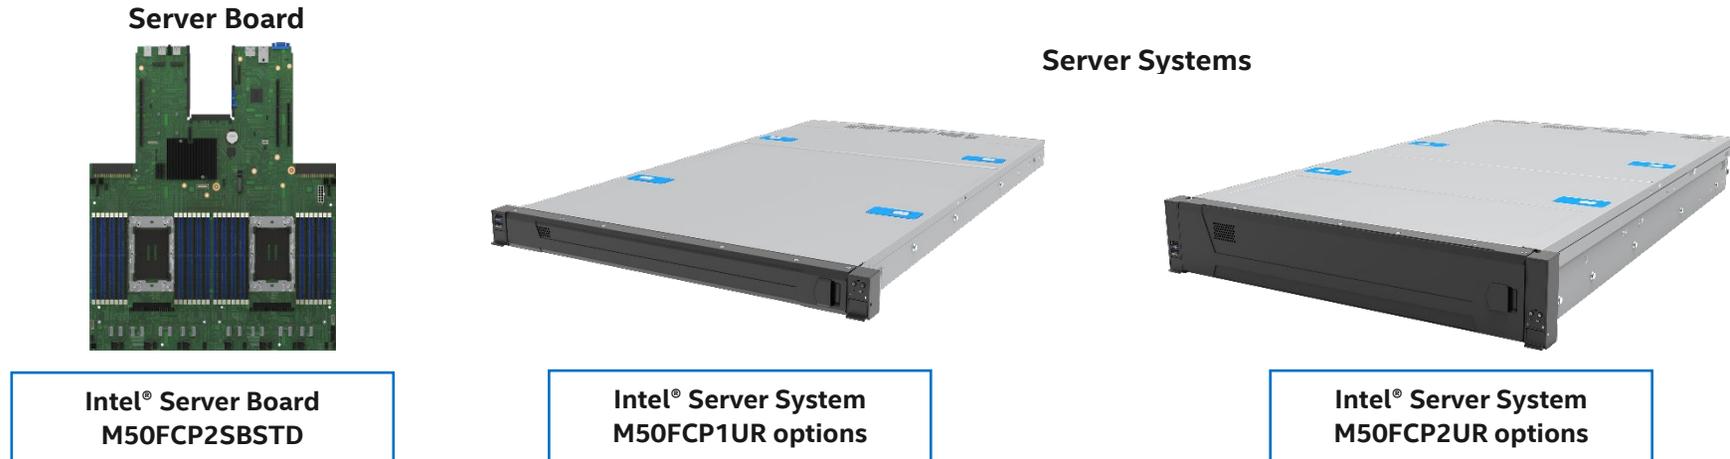


Figure 1. Intel® Server M50FCP Family Overview

The Intel® Server M50FCP Family includes:

- Server board only option:
 - Intel® Server Board M50FCP2SBSTD
- L6¹ Integrated server system options:
 - Intel® Server System M50FCP1UR – A family of 1U rack mount server systems integrated with an Intel® Server Board M50FCP2SBSTD.
 - Intel® Server System M50FCP2UR – A family of 2U rack mount server systems integrated with an Intel® Server Board M50FCP2SBSTD.

Refer to the following Intel documentation for additional information:

- Intel® Server Board M50FCP2SBSTD Technical Product Specification (TPS).
- Intel® Server System M50FCP1UR Technical Product Specification
- Intel® Server System M50FCP2UR Technical Product Specification

¹ An L6 integrated system requires installation of additional components to make the system power-on ready

1.1 Processor Support

The Intel® Server M50FCP Family includes two Socket E LGA4677 processor sockets on the server board that provide support for the 4th Gen Intel® Xeon® Scalable processor family. Supported processor SKUs for this Intel server product family can be identified as follows:

- Intel® Xeon® Platinum **84**xxxx
- Intel® Xeon® Gold **64**xxxx
- Intel® Xeon® Gold **54**xxxx
- Intel® Xeon® Silver **44**xxxx
- Intel® Xeon® Bronze **34**xxxx

The following figure illustrates how to identify supported processor SKUs.

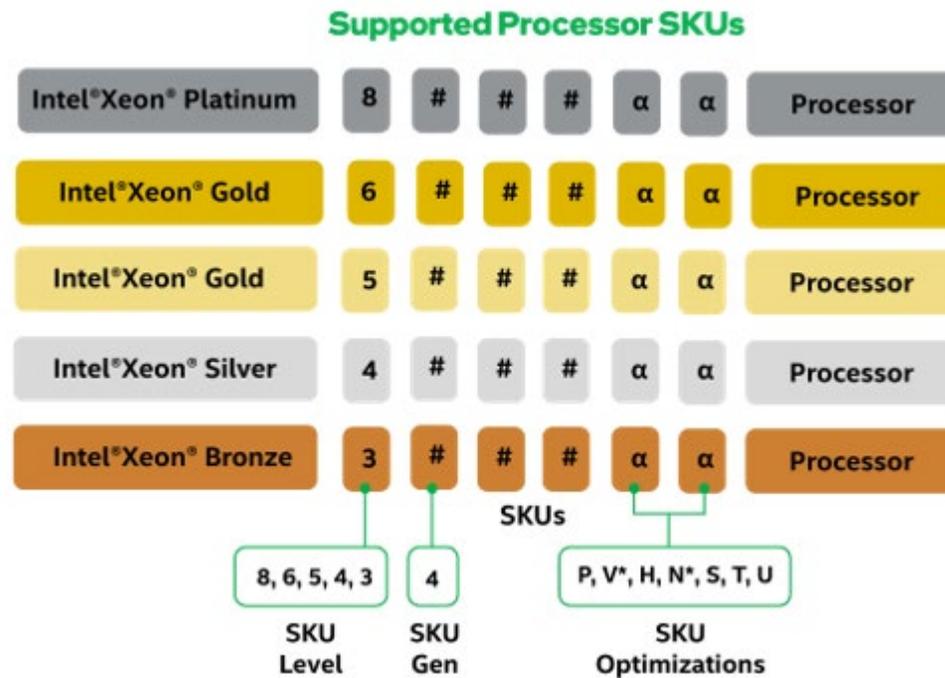


Figure 2. 4th Gen Intel® Xeon® Scalable Processor Identification

Notes:

- 4th Gen Intel® Xeon® Scalable processor SKU model numbers that end in (Q) are NOT supported. All other processor SKUs are supported.
 - Intel® Xeon® Bronze processors are supported in single processor configurations only.
 - Previous generation Intel® Xeon® processor families and Intel® Xeon® Scalable processor families are not supported.
-

Table 1. 4th Gen Intel® Xeon® Scalable Processor Family Feature Comparison

Feature	Platinum 8xxx Processors	Gold 6xxx Processors	Gold 5xxx Processors	Silver 4xxx Processors
# of Intel® Ultra Path Interconnect (Intel® UPI) Links	3	3	3	2
Intel® UPI Speed	16 GT/s	16 GT/s	16 GT/s	16 GT/s
Supported Topologies	2S-2UPI 2S-3UPI	2S-2UPI 2S-3UPI	2S-2UPI 2S-3UPI	2S-2UPI
Node Controller Support	No	No	No	No
RAS Capability	Advanced	Advanced	Advanced	Standard
Intel® Turbo Boost Technology	Yes	Yes	Yes	Yes
Intel® Hyper-Threading Technology (Intel® HT Technology)	Yes	Yes	Yes	Yes
Intel® Advanced Vector Extensions 512 (Intel® AVX-512) ISA Support	Yes	Yes	Yes	Yes
Intel® AVX-512 – # of 512b FMA Units	2	2	1	2
# of PCIe* Lanes	80	80	80	80
Intel® Volume Management Device (Intel® VMD)	Yes	Yes	Yes	Yes

Note: Features may vary between processor SKUs.

See the 4th Gen Intel® Xeon® Scalable processor specifications and product briefs for additional information.

1.2 Memory Support

The Intel® Server M50FCP Family supports the following memory features:

- 32 memory slots
 - 16 memory slots per processor, 8 memory channels per processor
 - 2 memory modules per channel
- Memory capacity
 - Up to 12 TB per processor (processor SKU dependent)
- Memory data transfer rates
 - Up to 4800 MT/s at one RDIMM per channel (processor SKU dependent)
 - Up to 4400 MT/s at two RDIMMs per channel (processor SKU dependent)
- Registered DDR5 DIMM
- Standard RDIMM
- 3DS-RDIMM –Note: 3DS = 3-dimensional stacking.
- 9x4 RDIMM
- All DDR5 RDIMMs must support ECC
- Intel® Optane™ PMem 300 series (App Direct Mode support only)
- DDR5 standard voltage of 1.1 V

Intel DDR5 DIMM Support Disclaimer

Intel validates and only supports system configurations where all installed DDR5 DIMMs have matching “Identical” or “Like” attributes (see the following table). A system configured with DDR5 DIMMs from different vendors is supported by Intel if all other DDR5 “Like” DIMM attributes match.

Intel does not perform system validation testing nor will it support system configurations where all populated DDR5 DIMMs do not have matching “Like” DIMM attributes as listed in the following table.

Intel only supports Intel server systems configured with DDR5 DIMMs that have been validated by Intel and are listed on Intel's Tested Memory list for the given Intel server product family.

Intel may offer and ship pre-integrated fully configured server systems. All DDR5 DIMMs within a given server system as shipped by Intel are identical. All installed DIMMs have matching attributes as listed in the “*Identical*” *DDR5 DIMM Attributes* column in the following table.

When purchasing multiple fully integrated server systems with the same configuration from Intel, Intel reserves the right to use “Like” DIMMs between server systems. At a minimum, “Like” DIMMs will have matching DIMM attributes as listed in the following table. However, the DIMM model #, revision #, or vendor may be different.

For warranty replacement, Intel will make every effort to ship back an exact match to the one returned. However, Intel may ship back a validated “Like” DIMM. A “Like” DIMM may be from the same vendor but may not be the same revision # or model #, or it may be an Intel-validated DIMM from a different vendor. At a minimum, all “Like” DIMMs shipped from Intel will match attributes of the original part according to the definition of “Like” DIMMs in the following table.

Table 2. DDR5 DIMM Attributes Table for “Identical” and “Like” DIMMs

<ul style="list-style-type: none"> • DDR5 DIMMs are considered “Identical” when ALL listed attributes between the DIMMs match • Two or more DDR5 DIMMs are considered “Like” DIMMs when all attributes minus the Vendor, and/or DIMM Part # and/or DIMM Revision#, are the same. 			
Attribute	“Identical” DDR5 DIMM Attributes	“Like” DDR5 DIMM Attributes	Possible DDR5 Attribute Values
Vendor	Match	May be Different	Memory Vendor Name
DIMM Part #	Match	May be Different	Memory Vendor Part #
DIMM Revision #	Match	May be Different	Memory Vendor Part Revision #
SDRAM Type	Match	Match	DDR5
DIMM Type	Match	Match	RDIMM, 9x4 RDIMM
Speed (MT/s)	Match	Match	4000, 4400, 4800
Voltage	Match	Match	1.1 V
DIMM Size (GB)	Match	Match	16 GB, 32 GB, 64 GB, 128 GB, 256 GB
Organization	Match	Match	2Gx80; 4Gx80; 8Gx80; 16Gx80; 32Gx80
DIMM Rank	Match	Match	1R, 2R, 4R, 8R
DIMM Raw Card (RC)	Match	Match	RC A, RC B, RC C, RC D, RC E, RC F
DRAM Width	Match	Match	x4, x8
DRAM Density	Match	Match	16 Gb

1.3 System Configuration Notes

- The Intel® Server Board M50FCP2SBSTD supports the 4th Gen Intel® Xeon® Scalable processor family.
- Previous generations of the Intel® Xeon® processors and Intel® Xeon® Scalable processor families are not supported.

Caution: Installing processors into the processor sockets should be done with great care. Proper processor orientation with the socket should be made before attempting to install the processor. Do not touch any of the contact pins within the processor socket. Doing so could result in bending them and rendering the slot inoperable.

- The server board supports two processor sockets, identified as CPU 0 and CPU 1. CPU 0 must be populated for the system to boot.
- Riser Slot #2 and Riser Slot #3 are only supported in dual processor configurations.
- Do not install a processor heat sink on to an unpopulated processor socket.
- For best performance, memory should be populated evenly across channels starting with the blue DIMM slot on each channel. For additional details, see the *Intel® Server System M50FCP1UR TPS* or *Intel® Server System M50FCP2UR TPS*.

Caution: Update the server platform to the latest system software posted to Intel's online Resource & Documentation Center (RDC) before attempting any validation testing. Intel highly recommends that you read the complete update instructions and release notes for each software component before updating the system.

- In a 1U system, all cables routed to the front drive bay from the PCIe riser area of the system, must be routed along the right chassis sidewall. No cables should be routed within the processor and DIMM slot areas of the server board.
- In a 2U system, cables routed to the front of the server system from the PCIe riser area of the system can be routed along either chassis sidewall. No cables should be routed within the processor or DIMM slot areas of the server board. The fan assembly must be removed when routing cables. Avoid pinching cables when reinstalling the fan assembly
- The back edge of the server board has a bank of eight diagnostic LEDs that display a sequence of power-on self-test (POST) codes during the boot process. Should the system hang during POST, the LEDs display the last POST event run before the hang. The decoder for these POST code LED sequences can be found in the *Intel® Server Board M50FCP2SBSTD TPS*.

1.4 Reference Documents and Support Collaterals

For additional information, see the product support collaterals specified in the following table.

Table 3. Product Family Reference Collaterals

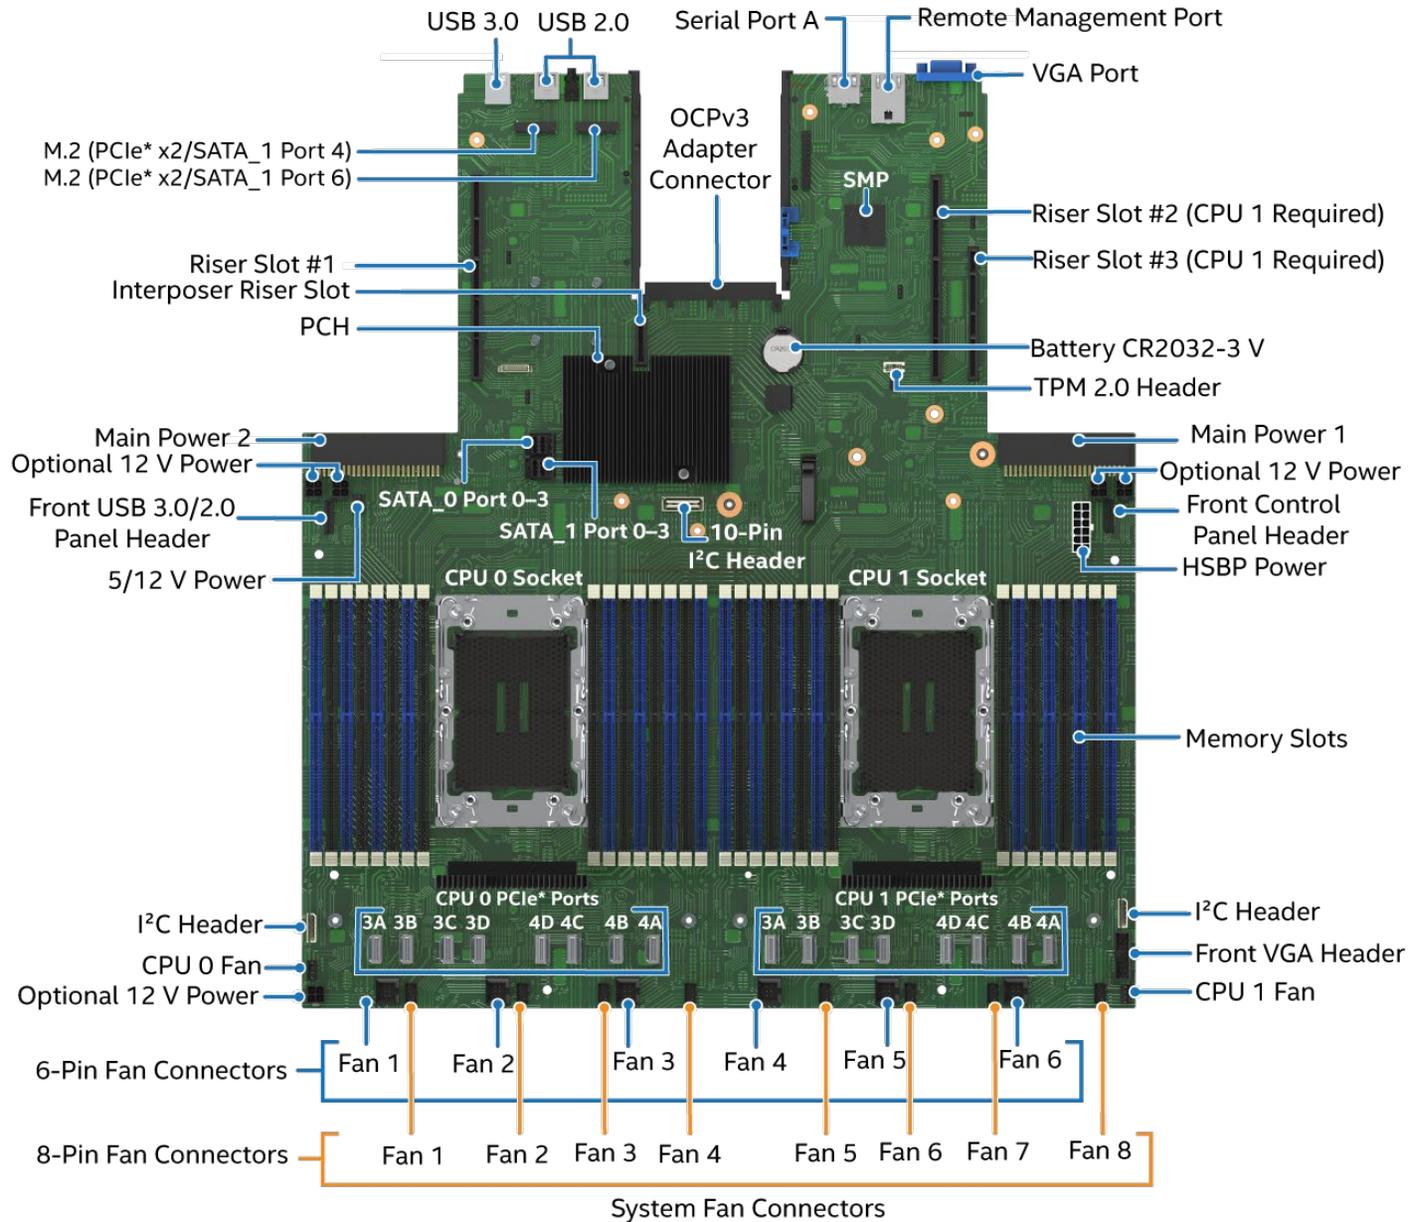
Topic	Document Title or Support Collateral	Document Classification
System integration instructions and service guidance for 2U	<i>Intel® Server System M50FCP2UR System Integration and Service Guide</i>	Public
System integration instructions and service guidance for 1U	<i>Intel® Server System M50FCP1UR System Integration and Service Guide</i>	Public
Technical system-level description for 2U	<i>Intel® Server System M50FCP2UR Technical Product Specification</i>	Public
Technical system-level description for 1U	<i>Intel® Server System M50FCP1UR Technical Product Specification</i>	Public
Technical board-level description	<i>Intel® Server Board M50FCP2SBSTD Technical Product Specification</i>	Public
Server configuration guidance and compatibility	<i>Intel® Server M50FCP Family Configuration Guide</i>	Public
Information on the Integrated BMC Web Console	<i>Integrated Baseboard Management Controller Web Console (Integrated BMC Web Console) User Guide</i>	Public
BIOS technical information on product family	<i>BIOS Firmware External Product Specification (EPS)</i>	Intel Confidential
BIOS setup information on product family	<i>BIOS Setup Utility User Guide</i>	Public
BMC technical information on product family	<i>Integrated Baseboard Management Controller Firmware External Product Specification (EPS)</i>	Intel Confidential
Base specifications for the IPMI architecture and interfaces	<i>Intelligent Platform Management Interface Specification Second Generation v2.0</i>	Intel Confidential
Specifications for the PCIe* 3.0 architecture and interfaces	<i>PCIe Base Specification, Revision 3.0</i> http://www.pcisig.com/specifications	Public
Specifications for the PCIe* 4.0 architecture and interfaces	<i>PCIe Base Specification, Revision 4.0</i> http://www.pcisig.com/specifications	Public
Specifications for the PCIe* 5.0 architecture and interfaces	<i>PCIe Base Specification, Revision 5.0</i> http://www.pcisig.com/specifications	Public
Specification for OCP*	Open Compute Project* (OCP*) Specification	Intel Confidential

Intel® Server M50FCP Family Configuration Guide

Topic	Document Title or Support Collateral	Document Classification
TPM for PC client specifications	<i>TPM PC Client Specifications, Revision 2.0</i>	Intel Confidential
Functional specifications of the 4 th Gen Intel® Xeon® Scalable processor family	<i>Sapphire Rapids External Design Specification (EDS)</i> Document IDs: 630161, 612246, 612172, 633350, 611488	Intel Confidential
Processor thermal design specifications and recommendations	<i>Sapphire Rapids Thermal and Mechanical Specifications and Design Guide (TMSDG)</i> Document ID 609847	Intel Confidential
BIOS and BMC security best practices	<i>Intel® Server Systems Baseboard Management Controller (BMC) and BIOS Security Best Practices White Paper</i> https://www.intel.com/content/www/us/en/support/articles/000055785/server-products.html	Public
Managing an Intel server overview	<i>Managing an Intel Server System 2020</i> https://www.intel.com/content/www/us/en/support/articles/000057741/server-products.html	Public
Technical information on Intel® Optane™ persistent memory (PMem) 300 series	<i>Intel® Optane™ Persistent Memory 300 Series Operations Guide</i>	Intel Confidential
Setup information for Intel® Optane™ PMem 300 series	<i>Intel® Optane™ Persistent Memory Startup Guide</i>	Public
Latest system software updates: BIOS and firmware	<i>Intel® System Update Package (SUP) for Intel® Server M50FCP Family</i>	Public
	<i>Intel® Server Firmware Update Utility - Various operating system support</i>	
	<i>Intel® Server Firmware Update Utility User Guide</i>	
To obtain full system information	<i>Intel® Server Information Retrieval Utility - Various operating system support</i>	Public
	<i>Intel® Server Information Retrieval Utility User Guide</i>	
To configure, save, and restore various system options	<i>Intel® Server Configuration Utility - Various operating system support</i>	Public
	<i>Intel® Server Configuration Utility User Guide</i>	
Product Warranty Information	<i>Warranty Terms and Conditions</i> https://www.intel.com/content/www/us/en/support/services/000005886.html	Public
Intel® Data Center Manager (Intel® DCM) information	<i>Intel® Data Center Manager (Intel® DCM) Product Brief</i> https://software.intel.com/content/www/us/en/develop/download/dcm-product-brief.html	Public
	<i>Intel® Data Center Manager (Intel® DCM) Console User Guide</i> https://software.intel.com/content/www/us/en/develop/download/dcm-user-guide.html	Public

Note: Intel Confidential documents are made available under a nondisclosure agreement (NDA) with Intel and must be ordered through a local Intel representative.

1.5 Intel® Server Board M50FCP2SBSTD



Ref #: FCP10245

Figure 3. Intel® Server Board M50FCP2SBSTD Component / Feature Identification

Table 4 provides general information and lists the features supported by the Intel® Server Board M50FCP2SBSTD.

Table 4. Intel® Server Board M50FCP2SBSTD Features

Feature	Details
Server Board	Intel® Server Board M50FCP2SBSTD
Server Board Dimensions	18.9" (480 mm) length x 16.9" (428 mm) width
Processor Support	<ul style="list-style-type: none"> • Dual Socket E LGA4677 • Supported 4th Gen Intel® Xeon® Scalable processor family SKUs: <ul style="list-style-type: none"> ○ Intel® Xeon® Platinum 84xxxx processor ○ Intel® Xeon® Gold 64xxxx processor ○ Intel® Xeon® Gold 54xxxx processor ○ Intel® Xeon® Silver 44xxxx processor ○ Intel® Xeon® Bronze 34xxxx processor <p>Intel® UPI links: 3 @ 16 GT/s (Platinum and Gold families) or 2 @ 16 GT/s (Silver family) Intel® Xeon® Bronze processors are used in single processor configurations only. Note: Previous generations of Intel® Xeon® processors are not supported.</p>
Maximum Supported Processor Thermal Design Power (TDP)	<p>350 W</p> <p>Note: The maximum supported processor TDP at the system level may be lower than what the server board can support. Supported power, thermal, and configuration limits of the chosen server chassis need to be considered to determine if the system can support the maximum processor TDP limit of the server board. Refer to the server chassis/system documentation for additional guidance.</p>
Chipset PCH	<ul style="list-style-type: none"> • Intel® C741 chipset platform controller hub (PCH) • Embedded features enabled on this server board: <ul style="list-style-type: none"> ○ SATA 3.0 support ○ USB 3.0 support ○ PCIe 3.0 support
Server Management Processor (SMP)	<ul style="list-style-type: none"> • ASpeed* AST2600 Advanced PCIe Graphics and Remote Management Processor • Embedded features enabled on this server board: <ul style="list-style-type: none"> ○ Baseboard Management Controller (BMC) ○ 2D Video Graphics Adapter
Memory Support	<ul style="list-style-type: none"> • 32 memory slots total <ul style="list-style-type: none"> ○ 8 memory channels per processor ○ 2 memory slots per channel • Registered SDRAM DDR5 DIMMs (RDIMM, 3DS-RDIMM, and 9x4 RDIMM) Note: 3DS = 3-dimensional stacking. • All DIMMs must support ECC • Intel® Optane™ PMem 300 series (App Direct Mode only) • Memory capacity: Up to 12 TB per processor (processor SKU dependent) using DDR5 RDIMMs combined with Intel® Optane™ PMem 300 series modules • Up to 4800 MT/s at one RDIMM per channel (processor SKU dependent) • Up to 4400 MT/s at two RDIMMs per channel (processor SKU dependent)

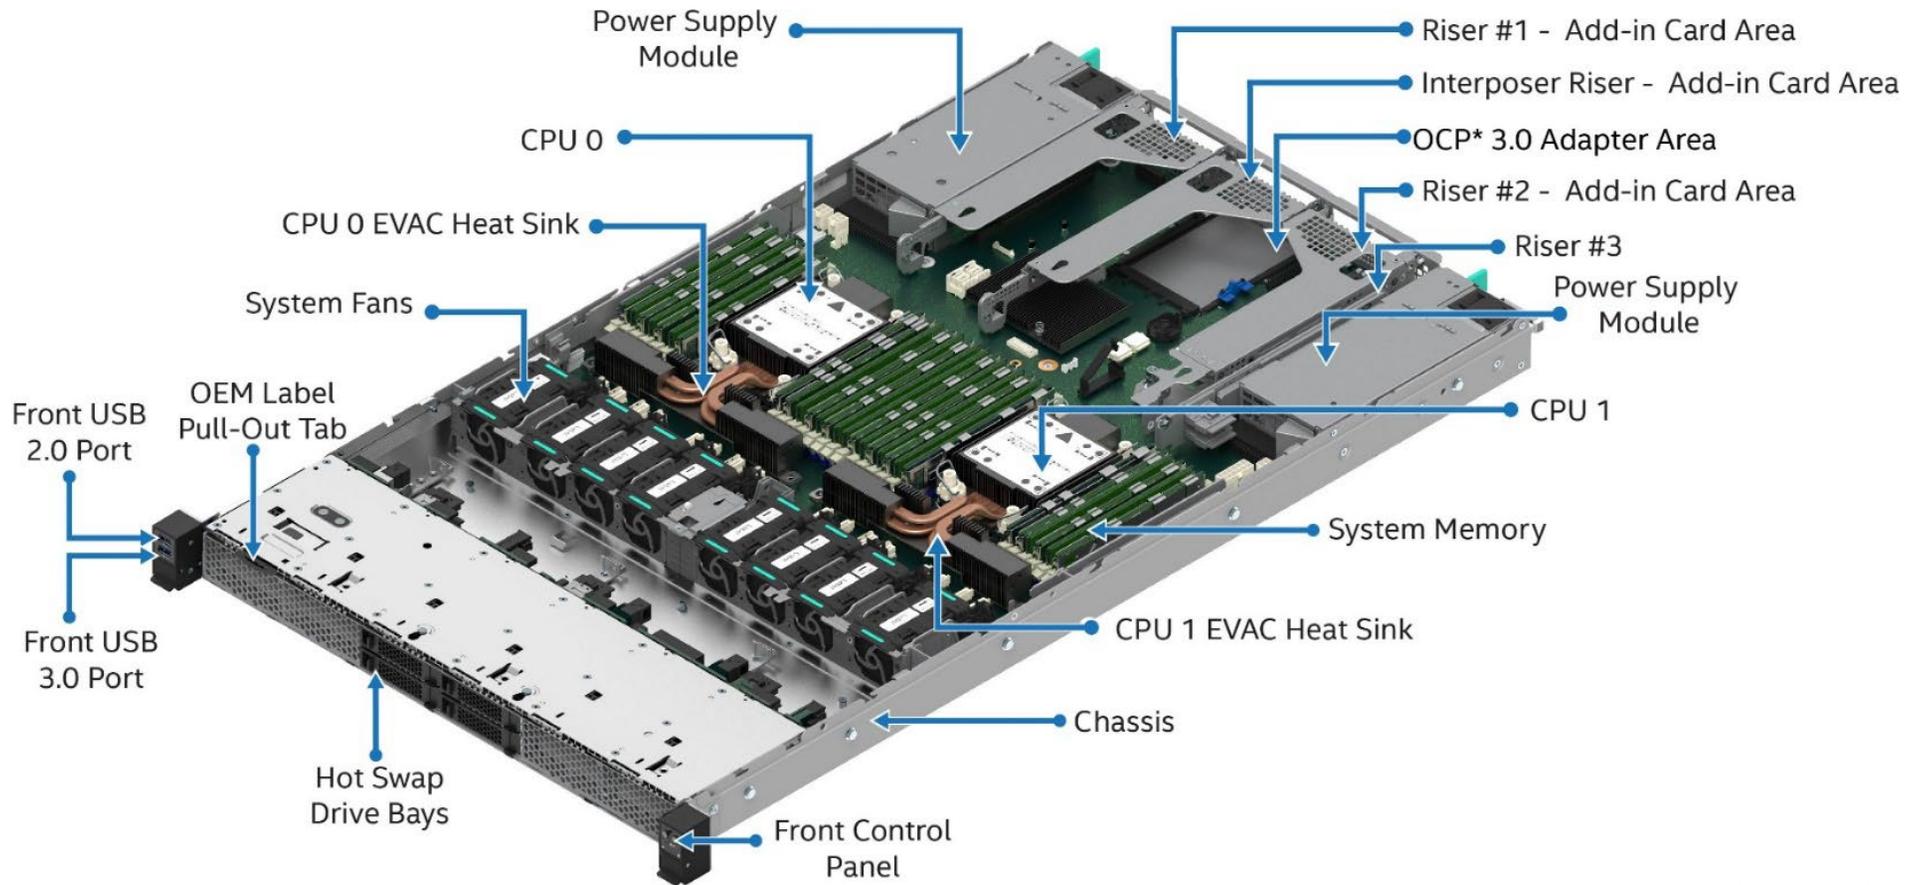
Feature	Details
System Fan Support	<ul style="list-style-type: none"> • DDR5 standard voltage of 1.1 V • Six 6-pin managed fan connectors • Eight 8-pin managed fan connectors • CPU fan headers (one for each CPU)
Onboard Network Support	Provided by optional Open Compute Project (OCP*) module support.
Open Compute Project (OCP*) Module Support	Server board x16 PCIe 5.0 OCP 3.0 connector (Small Form-Factor) slot. See section 5.3 for available options.
Riser Card Support	<p>Concurrent support for up to three riser cards with support for up to eight PCIe add-in cards. In the following description FH = Full Height, FL = Full Length, HL =Half Length, LP = Low Profile.</p> <p>Riser Slot #1</p> <ul style="list-style-type: none"> • Riser Slot #1 supports x32 PCIe lanes, routed from CPU 0 • PCIe 5.0 support for up to 64 GB/s <p>Riser Slot #1 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> • Two PCIe slot riser card (iPC FCP2URISER1DW), which supports: <ul style="list-style-type: none"> ○ One FH/FL double-width slot (x16 electrical, x16 mechanical) ○ One FH/HL single-width slot (x16 electrical, x16 mechanical) • Two PCIe slot riser card (iPC FCP2URISER1SW), which supports: <ul style="list-style-type: none"> ○ Two FH/FL single-width slot (x16 electrical, x16 mechanical) • Three PCIe slot riser card (iPC FCP2URISER1STD), which supports: <ul style="list-style-type: none"> ○ One FH/FL single-width slot (x16 electrical, x16 mechanical) ○ One FH/FL single-width slot (x8 electrical, x16 mechanical) ○ One FH/HL single-width slot (x8 electrical, x8 mechanical) • NVMe riser card (iPC FCP2URISER1RTM), which supports: <ul style="list-style-type: none"> ○ One FH/FL single-width slot (x16 electrical, x16 mechanical) ○ Two x8 PCIe NVMe MCI/O connectors, each with a retimer • One PCIe slot riser card (iPC FCP1URISER1), which supports: <ul style="list-style-type: none"> ○ One LP/HL, single-width slot (x16 electrical, x16 mechanical) <p>Riser Slot #2</p> <ul style="list-style-type: none"> • Riser Slot #2 supports x32 PCIe lanes, routed from CPU 1 • PCIe 5.0 support for up to 64 GB/s <p>Riser Slot #2 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> • Two PCIe slot riser card (iPC FCP2URISER2DW), which supports: <ul style="list-style-type: none"> ○ One FH/FL double-width slot (x16 electrical, x16 mechanical) ○ One FH/HL single-width slot (x16 electrical, x16 mechanical) • Two PCIe slot riser card (iPC FCP2URISER2SW), which supports: <ul style="list-style-type: none"> ○ Two FH/FL single-width slot (x16 electrical, x16 mechanical) • Three PCIe slot riser card (iPC FCP2URISER2STD), which supports: <ul style="list-style-type: none"> ○ One FH/FL single-width slot (x16 electrical, x16 mechanical)

Feature	Details
Riser Card Support (Cont.)	<ul style="list-style-type: none"> ○ One FH/FL single-width slot (x8 electrical, x16 mechanical) ○ One FH/HL single-width slot (x8 electrical, x8 mechanical) ● One PCIe slot riser card (iPC FCP1URISER2), which supports: <ul style="list-style-type: none"> ○ One LP/HL, single-width slot (x16 electrical, x16 mechanical) ● Riser card (iPC FCP1URISER2KIT), which supports: <ul style="list-style-type: none"> ○ One LP/HL, single-width slot (x16 electrical, x16 mechanical) ○ One x8 PCIe MCIO connector with retimer <p>PCIe* Interposer Riser Slot</p> <ul style="list-style-type: none"> ● Interposer riser card supports x8 PCIe lanes, routed from CPU 1 via Riser Slot #2 ● PCIe 5.0 support for 64 GB/s ● PCIe Interposer Riser Slot supports the PCIe interposer riser card as an accessory option. This card supports one PCIe add-in card (x8 electrical, x8 mechanical). The PCIe interposer riser card can be used only when it is connected to the PCIe riser card in Riser Slot #2. The interposer riser card uses x8 PCIe data lanes routed from the PCIe MCIO connector on the PCIe riser card. The Intel accessory kit (iPC FCP1URISER2KIT) includes the PCIe interposer riser card, PCIe riser card, and PCIe interposer cable. <p>Riser Slot #3</p> <ul style="list-style-type: none"> ● Riser Slot #3 supports x16 PCIe lanes, routed from CPU 1 ● PCIe 5.0 support for up to 64 GB/s <p>Riser Slot #3 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> ● Two PCIe slot riser card (iPC FCP2URISER3STD), which supports: <ul style="list-style-type: none"> ○ Two LP/HL single-width slots (x16 mechanical, x8 electrical) ● NVMe riser card (iPC CYPRISER3RTM), which supports: <ul style="list-style-type: none"> ○ Two PCIe NVMe* SlimSAS* connectors with retimers
PCIe* NVMe* Support	<ul style="list-style-type: none"> ● Support for up to 18 PCIe NVMe Interconnects <ul style="list-style-type: none"> ○ 16 onboard MCIO connectors, eight per processor ○ Two M.2 NVMe/SATA connectors ● Additional NVMe support through select riser card options (See Riser Card Support) ● Volume Management Device (VMD) support
Video Support	<ul style="list-style-type: none"> ● Integrated 2D video controller ● 128 MB of DDR4 video memory ● One DB-15 VGA Port in the back of the server board ● One 2x7 VGA header on the front right side of the server board
Onboard SATA Support	<ul style="list-style-type: none"> ● 10 x SATA III ports (6 Gb/s, 3 Gb/s, and 1.5 Gb/s transfer rates supported) <ul style="list-style-type: none"> ○ Two M.2 connectors: SATA / PCIe ○ Two 4-port Mini-SAS HD (SFF-8643) connectors
USB Support	<ul style="list-style-type: none"> ● One USB 3.0 and two USB 2.0 connectors on the back edge of the board ● Internal 26-pin connector for optional one USB 3.0 port and one USB 2.0 port front panel support
Serial Support	<ul style="list-style-type: none"> ● One external RJ-45 Serial Port A connector on the back edge of the server board
Server Management	<ul style="list-style-type: none"> ● Integrated Baseboard Management Controller (BMC) with support for OpenBMC ● 1000BASE-T Ethernet port (RJ45) dedicated to server management ● Integrated BMC Web Console ● Intelligent Platform Management Interface (IPMI) 2.0 compliant

Feature	Details
Server Management (Cont.)	<ul style="list-style-type: none"> • Support for Intel® Data Center Manager (Intel® DCM) • Support for Intel® Server Debug and Provisioning Tool (Intel® SDP Tool) • Redfish* compliant • Light Guided Diagnostics • Optional Advanced Server Management features (Purchased separately)
System Configuration and Recovery Jumpers	<ul style="list-style-type: none"> • BIOS load defaults • BIOS password clear • Intel® Management Engine firmware force update Jumper • BIOS_SVN downgrade • BMC_SVN downgrade
Security Support	<ul style="list-style-type: none"> • Intel® Platform Firmware Resilience (Intel® PFR) technology with an I2C interface • Intel® Software Guard Extensions (Intel® SGX) • Converged Intel® Boot Guard and Trusted Execution Technology (Intel® TXT) • Intel® Total Memory Encryption – Multi-Key (Intel® TME-MK) • Trusted platform module 2.0 (China version) – iPC AXXTPMCHNE8 (accessory option) • Trusted platform module 2.0 (rest of the world) – iPC AXXTPMENC9 (accessory option)
BIOS	<ul style="list-style-type: none"> • Unified Extensible Firmware Interface (UEFI)-based BIOS (legacy boot not supported)

1.6 Intel® Server System M50FCP1UR

This section provides an overview of the features and available system options for the 1U rack mount Intel® Server System M50FCP1UR.



Ref #: FCP20221

Figure 4. Intel® Server System M50FCP1UR Components Overview



Figure 5. 4 x 2.5" Front Drive Bay Configuration – iPC M50FCP1UR204



Figure 6. 12 x 2.5" Front Drive Bay Configuration – iPC M50FCP1UR212

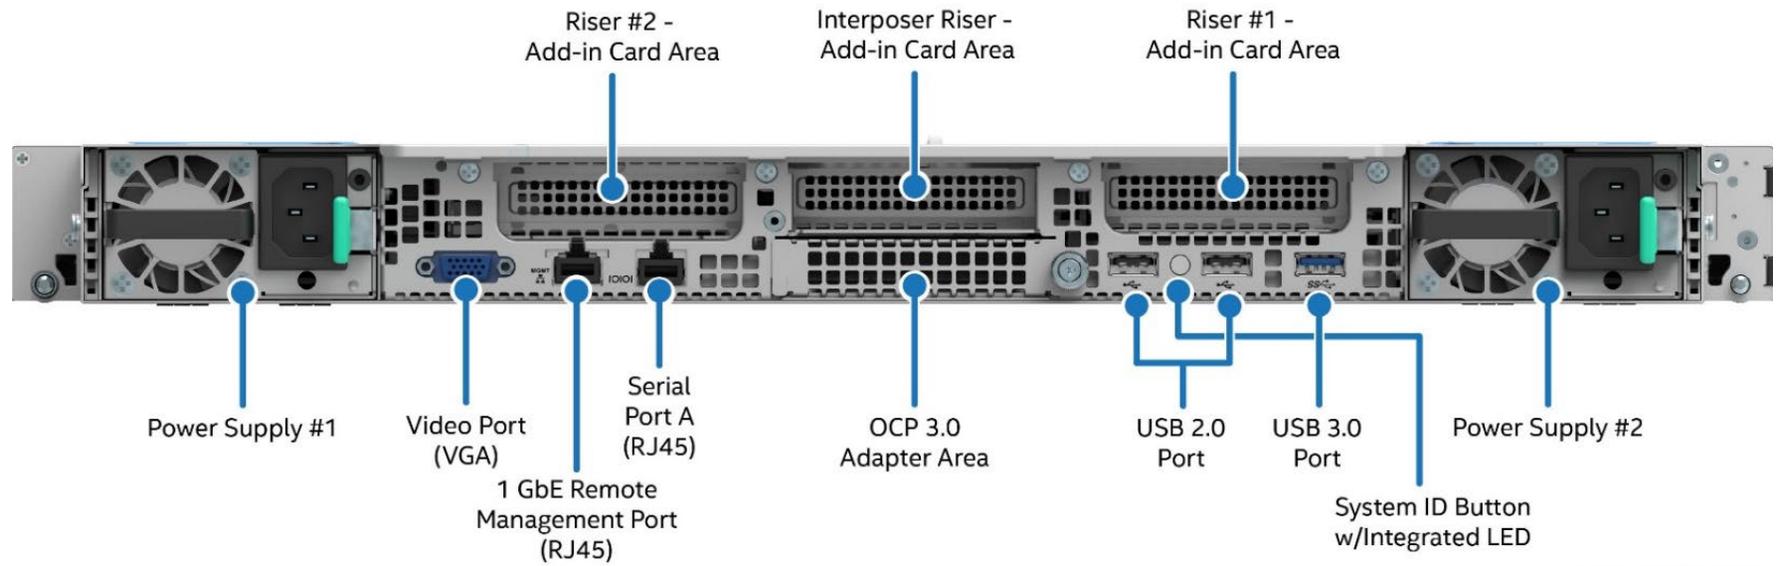


Figure 7. Back Panel Feature Identification

Ref #: FCP20013

The following table provides general information and lists the features and configuration options of the Intel® Server System M50FCP1UR.

Table 5. Intel® Server System M50FCP1UR Features

Feature	Details
Chassis Type	1U rack mount chassis
Chassis Dimensions	767x 438.5 x 43 mm (L x W x H)
Server Board	Intel® Server Board M50FCP2SBSTD
Processor Support	<ul style="list-style-type: none"> • Dual Socket-E LGA4677 • Supported 4th Gen Intel® Xeon® Scalable processor family SKUs: <ul style="list-style-type: none"> ○ Intel® Xeon® Platinum 84xxxx processor ○ Intel® Xeon® Gold 64xxxx processor ○ Intel® Xeon® Gold 54xxxx processor ○ Intel® Xeon® Silver 44xxxx processor ○ Intel® Xeon® Bronze 34xxxx processor • Intel® UPI links: 3 at 16 GT/s (Platinum and Gold) or 2 at 16 GT/s (Silver) • Intel® Xeon® Bronze processors are used in single processor configurations only. <p>Note: Previous generation Intel® Xeon® processor and Intel® Xeon® Scalable processor families are not supported.</p> <p>Note: For processor support details, see the <i>Intel® Server Board M50FCP2SBSTD Technical Product Specification</i>.</p>
Maximum Supported Processor Thermal Design Power (TDP)	<ul style="list-style-type: none"> • Up to 350W – Intel® Server System M50FCP1UR204 – 4x2.5” Drive Configurations • Up to 205W – Intel® Server System M50FCP1UR212 – 12x2.5” Drive Configurations <p>Note: The maximum supported processor TDP is dependent on the specific system configuration. Refer to the Intel® Server System M50FCP1UR Technical Product Specification (TPS) for more information.</p>
Chipset	<ul style="list-style-type: none"> • Intel® C741 chipset platform controller hub (PCH) • Embedded features enabled on this server board: <ul style="list-style-type: none"> ○ SATA 3.0 support ○ USB 3.0 support ○ PCIe 3.0 support
Memory Support	<ul style="list-style-type: none"> • 32 memory slots: <ul style="list-style-type: none"> ○ 16 memory slots per processor, eight memory channels per processor ○ Two memory modules per channel • Registered DDR5 DIMM (standard RDIMM, 3DS-RDIMM, and 9x4 RDIMM) <p>Note: 3DS = 3-dimensional stacking.</p> • All DDR5 DIMMs must support ECC • Intel® Optane™ PMem 300 series (App Direct Mode only) • Memory capacity • Up to 12 TB per processor (processor SKU dependent) using DDR5 DIMMs combined with Intel Optane PMem 300 series modules • Memory data transfer rates <ul style="list-style-type: none"> ○ Up to 4800 MT/s at one DIMM per channel (processor SKU dependent) ○ Up to 4400 MT/s at two DIMMs per channel (processor SKU dependent) • DDR5 standard voltage of 1.1 V <p>Note: For memory support details, see the <i>Intel® Server Board M50FCP2SBSTD Technical Product Specification</i>.</p>

Feature	Details
System Fan Support	<ul style="list-style-type: none"> Eight managed 40-mm hot swap capable system fans Integrated fans included with each installed power supply module <p>Note: System fan redundancy may only be supported on specific system configurations. See the Intel® Server System M50FCP1UR Technical Product Specification (TPS) for more information.</p>
Power Supply Options	<ul style="list-style-type: none"> The server system can support one or two power supply modules configurations. Depending on the power supply configuration, the system will support the following power operating modes: <ul style="list-style-type: none"> 1+0 – Single functional power supply 1+1 – redundant power 2+0 – combined power, no redundancy Power supply options: <ul style="list-style-type: none"> AC 1300 W Titanium AC 1600 W Titanium
Server Board Network Support	See optional Open Compute Project (OCP) adapter support.
Open Compute Project* (OCP*) Adapter Support	Server board x16 PCIe 5.0 OCP 3.0 connector (Small Form-Factor) slot. See section 5.3 for available options.
Riser Card Support	<p>Concurrent support for up to four riser cards, including one PCIe Interposer riser card, with support for up to three PCIe add-in cards. In the following description HL = Half Length, LP = Low Profile.</p> <p>Riser Slot #1</p> <ul style="list-style-type: none"> Riser Slot #1 supports x16 PCIe lanes routed from CPU 0 PCIe 5.0 support for up to 32 GB/s <p>Riser Slot #1 supports the following Intel riser card option:</p> <ul style="list-style-type: none"> PCIe slot riser card (iPC FCP1URISER1), which supports: <ul style="list-style-type: none"> One single-width slot (x16 electrical, x16 mechanical) <p>Riser Slot #2</p> <ul style="list-style-type: none"> Riser Slot #2 supports X24 PCIe lanes routed from CPU 1 PCIe 5.0 support for up to 32 GB/s <p>Riser Slot #2 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> PCIe slot riser card (iPC FCP1URISER2), which supports: <ul style="list-style-type: none"> One LP/HL, single-width slot (x16 electrical, x16 mechanical) Riser card (iPC FCP1URISER2KIT), which supports: <ul style="list-style-type: none"> One LP/HL, single-width slot (x16 electrical, x16 mechanical) One x8 PCIe MCIO connector with retimer <p>PCIe* Interposer Riser Slot (requires PCIe* Riser Card in Riser Slot #2)</p> <ul style="list-style-type: none"> PCIe interposer riser slot, which supports the PCIe interposer riser card as an accessory option. This card supports one PCIe add-in card (x8 electrical, x8 mechanical). The PCIe interposer riser card can be used only when it is connected to the PCIe riser card in Riser Slot #2. The interposer riser card uses x8 PCIe data lanes routed from the PCIe MCIO connector on the PCIe riser card. The Intel accessory kit (iPC FCP1URISER2KIT) includes the PCIe interposer riser card, PCIe riser card, and PCIe interposer cable.

Feature	Details
Riser Card Support (Cont.)	<p>Riser Slot #3</p> <ul style="list-style-type: none"> • Riser Slot #3 supports x16 PCIe lanes routed from CPU 1 • PCIe 5.0 support for up to 32 GB/s <p>Riser Slot #3 supports the following Intel riser card option:</p> <ul style="list-style-type: none"> • NVMe riser card (iPC CYPRISER3RTM), which supports: <ul style="list-style-type: none"> ○ Two PCIe NVMe SlimSAS* connectors <p>Note: Riser Slot #3 does not support add-in cards.</p>
PCIe* NVMe* Support	<ul style="list-style-type: none"> • 16 server board mounted PCIe MCIO connectors, eight per processor (up to 12 used in 1U) • Additional NVMe support through select riser card options (See Riser Card Support) • Two M.2 NVMe/SATA connectors • Volume Management Device (VMD) support
Video Support	<ul style="list-style-type: none"> • Integrated 2D video controller • 128 MB of DDR4 video memory • One VGA connector on the rear of the chassis.
Server Board SATA Support	<ul style="list-style-type: none"> • 10 x SATA III ports (6 Gb/s, 3 Gb/s, and 1.5 Gb/s transfer rates supported) <ul style="list-style-type: none"> ○ Two M.2 connectors: SATA / PCIe ○ Two 4-port Mini-SAS HD (SFF-8643) connectors
USB Support	<ul style="list-style-type: none"> • One USB 3.0 and two USB 2.0 connectors on the rear of the chassis • One USB 3.0 and one USB 2.0 connector on the front panel
Serial Support	<ul style="list-style-type: none"> • One external RJ-45 Serial Port A connector on the rear of the chassis
Front Drive Bay Options	<ul style="list-style-type: none"> • 4 x 2.5" SAS/SATA/NVMe hot swap drive bays (iPC – M50FCP1UR204) • 12 x 2.5" SAS/SATA/NVMe hot swap drive bays (iPC M50FCP1UR212)
Server Management	<ul style="list-style-type: none"> • Integrated Baseboard Management Controller (BMC) • One dedicated RJ45 1 GbE server management port • Intelligent Platform Management Interface (IPMI) 2.0 compliant • Redfish* compliant • Support for Intel® Data Center Manager (Intel® DCM) • Support for Intel® Server Debug and Provisioning Tool (Intel® SDP Tool) • Integrated BMC Web Console • Intel® Light-Guided Diagnostics • Optional Advanced Server Management features (Purchased separately)
Server Management Processor (SMP)	<ul style="list-style-type: none"> • Aspeed AST2600* Advanced PCIe Graphics and Remote Management Processor • Embedded features enabled on this server board: <ul style="list-style-type: none"> • Baseboard management controller (BMC) • 2D video graphics adapter
System Configuration and Recovery Jumpers	<ul style="list-style-type: none"> • BIOS load defaults • BIOS password clear • Intel® Management Engine (Intel® ME) firmware force update • BIOS_SVN downgrade • BMC_SVN downgrade
Security Support	<ul style="list-style-type: none"> • Intel® Platform Firmware Resilience (Intel® PFR) technology with an I2C interface • Intel® Software Guard Extensions (Intel® SGX)

Feature	Details
Security Support (Cont.)	<ul style="list-style-type: none"> • Converged Intel® Boot Guard and Intel® Trusted Execution Technology (Intel® TXT) • Intel® Total Memory Encryption – Multi-Key (Intel® TME-MK) • Trusted platform module 2.0 (China version): iPC AXXTPMCHNE8 (accessory option) • Trusted platform module 2.0 (rest of the world): iPC AXXTPMENC9 (accessory option)
Supported Rack Mount Kit Accessory Options (Purchased Separately)	<ul style="list-style-type: none"> • CYPHALFEXTRAIL – Value rack mount rail kit • CYPFULLEXTRAIL – Premium rail kit with cable management arm (CMA) support • AXXCMA2 – Cable management arm (supports CYPFULLEXTRAIL only)
BIOS	<ul style="list-style-type: none"> • Unified Extensible Firmware Interface (UEFI)-based BIOS (legacy boot not supported)

1.7 Intel® Server System M50FCP2UR

This section provides an overview of the system options available with the Intel® Server System M50FCP2UR.

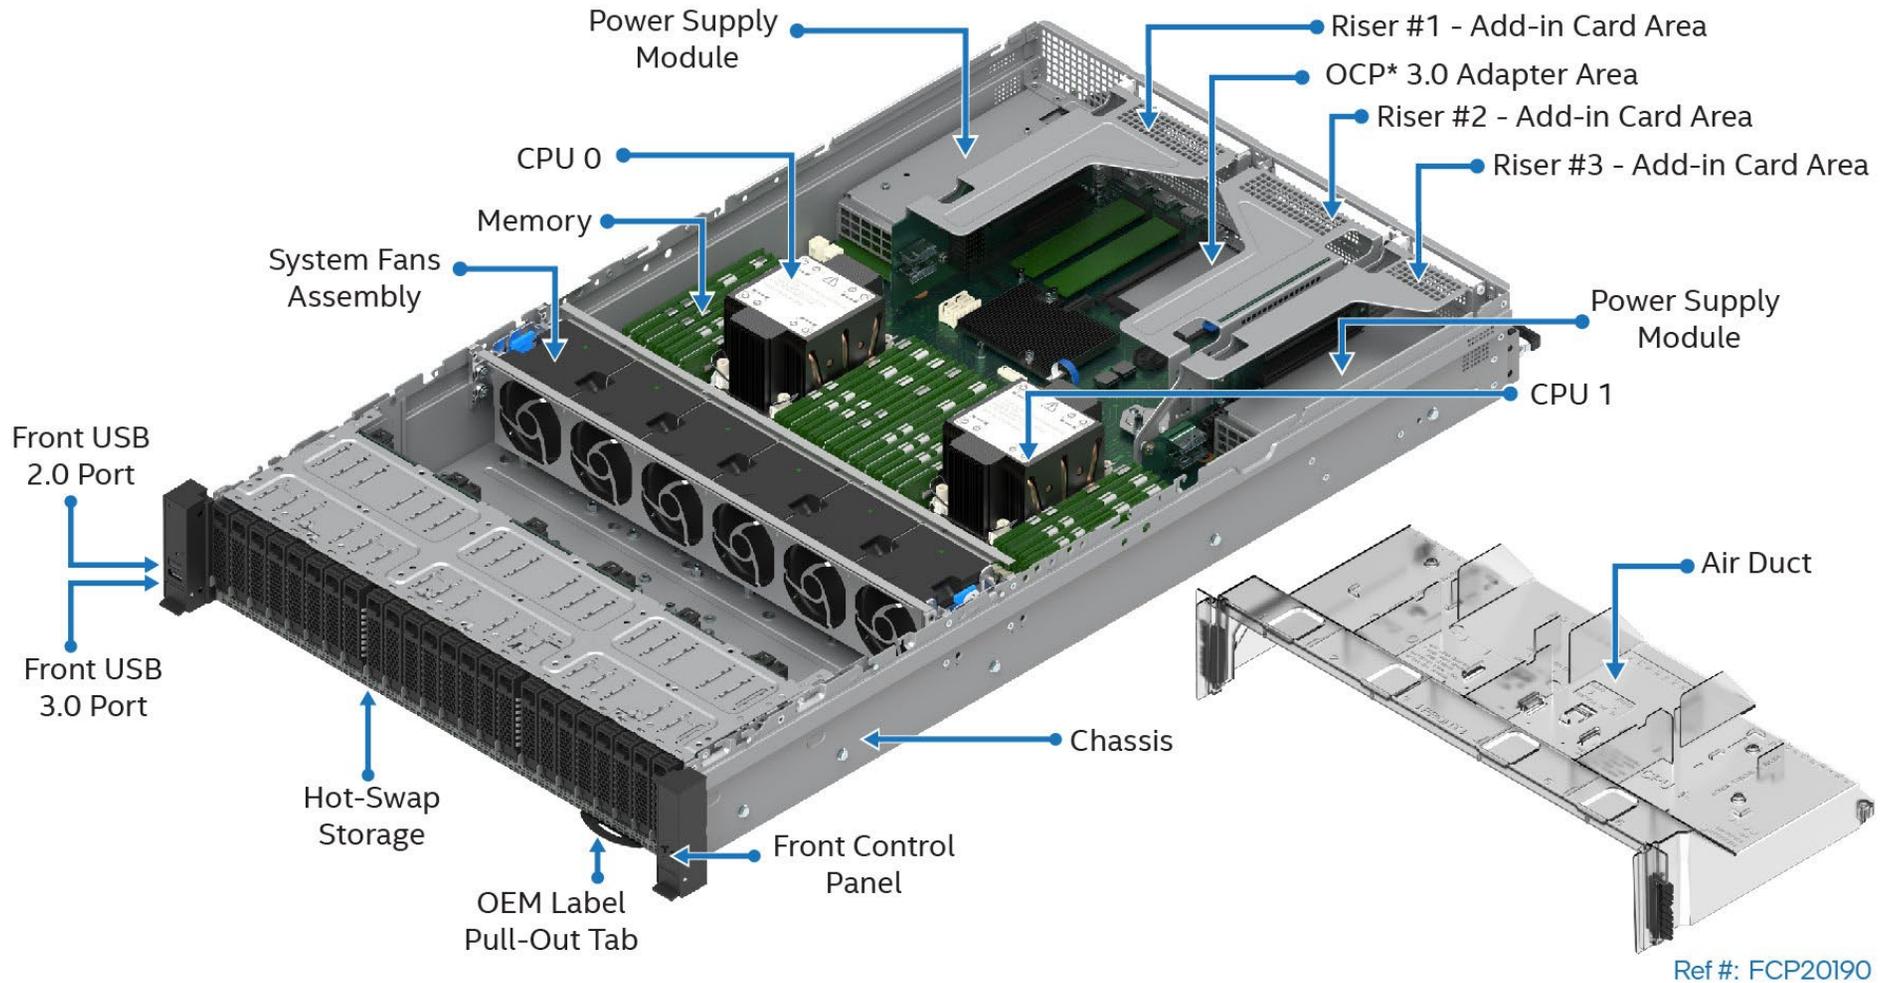


Figure 8. Intel® Server System M50FCP2UR Feature Set Identification



Figure 9. 2U 8 x 2.5" Front Drive Bay Configuration – iPC M50FCP2UR208

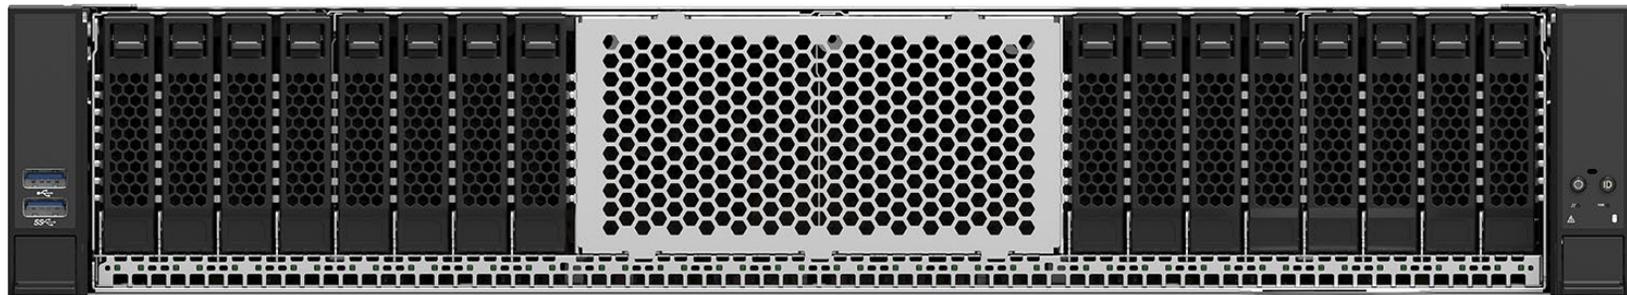


Figure 10. 2U 16 x 2.5" Front Drive Bay Configuration (based on M50FCP2UR208 with accessory options)

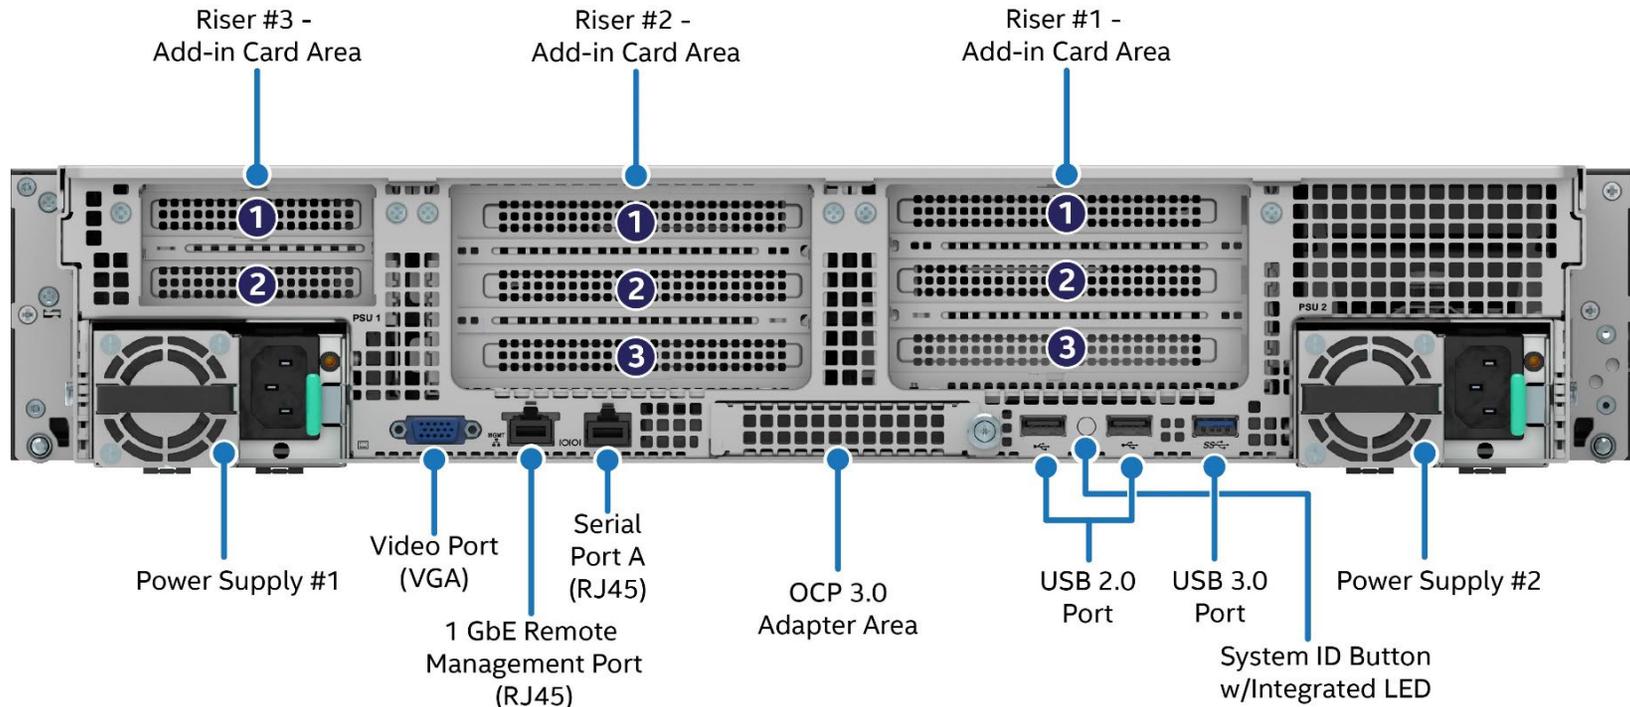


Figure 11. 2U 24 x 2.5" Front Drive Bay Configuration (based on M50FCP2UR208 with accessory options)



CYP20033

Figure 12. 2U 12 x 3.5" Front Drive Bay Configuration – iPC M50FCP2UR312



Ref #: FCP20023

Figure 13. 2U Back Panel Feature Identification

The following table provides general information and lists the features and configuration options of the Intel® Server System M50FCP2UR.

Table 6. Intel® Server System M50FCP2UR Features

Feature	Details
Chassis Type	2U rack mount chassis
Chassis Dimensions	769.6 x 438 x 87 mm (L x W x H)
Server Board	Intel® Server Board M50FCP2SBSTD
Processor Support	<ul style="list-style-type: none"> • Dual Socket- E LGA4677 • Supported 4th Gen Intel® Xeon® Scalable processor family SKUs: <ul style="list-style-type: none"> ○ Intel® Xeon® Platinum 84xxxx processor ○ Intel® Xeon® Gold 64xxxx processor ○ Intel® Xeon® Gold 54xxxx processor ○ Intel® Xeon® Silver 44xxxx processor ○ Intel® Xeon® Bronze 34xxxx processor • Intel® UPI links: up to 3 at 16 GT/s (Platinum and Gold) or up to 2 at 16 GT/s (Silver) • Intel® Xeon® Bronze processors are used in single processor configurations only. <p>Notes: Previous generation Intel® Xeon® processor and Intel® Xeon® Scalable processor families are not supported. For processor support details, see the Intel® Server Board M50FCP2SBSTD Technical Product Specification.</p>
Maximum Supported Processor Thermal Design Power (TDP)	<ul style="list-style-type: none"> • Up to 350 W <p>Note: The maximum supported processor TDP is dependent on the system configuration. See product TPS for additional information</p>
Chipset	<ul style="list-style-type: none"> • Intel® C741 chipset platform controller hub (PCH) • Embedded features enabled on this server board: <ul style="list-style-type: none"> ○ SATA 3.0 support ○ USB 3.0 support ○ PCIe 3.0 support
Memory Support	<ul style="list-style-type: none"> • 32 memory slots <ul style="list-style-type: none"> ○ 16 memory slots per processor, eight memory channels per processor ○ Two memory modules per channel • Registered DDR5 DIMM (standard RDIMM, 3DS-RDIMM, and 9x4 RDIMM) <p>Note: 3DS = 3-dimensional stacking.</p> • All DDR5 DIMMs must support ECC • Intel® Optane™ PMem 300 series (App Direct Mode support only) • Memory capacity • Up to 12 TB per processor (processor SKU dependent) using DDR5 DIMMs combined with Intel Optane PMem 300 series modules • Memory data transfer rates <ul style="list-style-type: none"> ○ Up to 4800 MT/s at one DIMM per channel (processor SKU dependent) ○ Up to 4400 MT/s at two DIMMs per channel (processor SKU dependent) • DDR5 standard voltage of 1.1 V <p>Note: For memory support details, see the <i>Intel® Server Board M50FCP2SBSTD Technical Product Specification</i>.</p>

Feature	Details
System Fan Support	<ul style="list-style-type: none"> • Six managed 60-mm hot swap capable system fans • Integrated fans included with each installed power supply module
Power Supply Options	<ul style="list-style-type: none"> • The server system can support one or two power supply modules configurations. • Depending on the power supply configuration, the system will support the following power operating modes: <ul style="list-style-type: none"> ○ 1+0 – Single functional power supply ○ 1+1 – redundant power ○ 2+0 – combined power, no redundancy • Power supply options: <ul style="list-style-type: none"> ○ AC 1300 W Titanium ○ AC 1600 W Titanium ○ AC 2100 W Platinum
Onboard Network Support	Provided by optional Open Compute Project* (OCP*) adapter support.
Open Compute Project* (OCP*) Adapter Support	Server board x16 PCIe 5.0 OCP 3.0 connector (Small Form-Factor) slot. See section 5.3 for available options.
Riser Card Support	<p>Concurrent support for up to three riser cards with support for up to eight PCIe add-in cards. In the following description FH = Full Height, FL = Full Length, HL =Half Length, LP = Low Profile.</p> <p>Riser Slot #1</p> <ul style="list-style-type: none"> • Riser Slot #1 supports x32 PCIe lanes, routed from CPU 0 • PCIe 5.0 support for up to 64 GB/s <p>Riser Slot #1 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> • Two PCIe slot riser card (iPC FCP2URISER1DW), which support: <ul style="list-style-type: none"> ○ One FH/FL double-width slot (x16 electrical, x16 mechanical) ○ One FH/HL single-width slot (x16 electrical, x16 mechanical) • Two PCIe slot riser card (iPC FCP2URISER1SW), which support: <ul style="list-style-type: none"> ○ Two FH/FL single-width slot (x16 electrical, x16 mechanical) • Three PCIe slot riser card (iPC FCP2URISER1STD), which support: <ul style="list-style-type: none"> ○ One FH/FL single-width slot (x16 electrical, x16 mechanical) ○ One FH/FL single-width slot (x8 electrical, x16 mechanical) ○ One FH/HL single-width slot (x8 electrical, x8 mechanical) • NVMe riser card (iPC FCP2URISER1RTM), which supports: <ul style="list-style-type: none"> ○ One HL or FL single-width slot (x16 electrical, x16 mechanical) ○ Two x8 PCIe NVMe MCI/O connectors, each with a re-timer <p>Riser Slot #2</p> <ul style="list-style-type: none"> • Riser Slot #2 supports x32 PCIe lanes, routed from CPU 1 • PCIe 5.0 support for up to 64 GB/s <p>Riser Slot #2 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> • Two PCIe slot riser card (iPC FCP2URISER2DW), which support: <ul style="list-style-type: none"> ○ One FH/FL double-width slot (x16 electrical, x16 mechanical) ○ One FH/HL single-width slot (x16 electrical, x16 mechanical) • Two PCIe slot riser card (iPC FCP2URISER2SW), which support: <ul style="list-style-type: none"> ○ Two FH/FL single-width slot (x16 electrical, x16 mechanical)

Feature	Details
Risser Card Support (Cont.)	<ul style="list-style-type: none"> • Three PCIe slot riser card (iPC FCP2URISER2STD), which support: <ul style="list-style-type: none"> ○ One FH/FL single-width slot (x16 electrical, x16 mechanical) ○ One FH/FL single-width slot (x8 electrical, x16 mechanical) ○ One FH/HL single-width slot (x8 electrical, x8 mechanical) <p>Riser Slot #3</p> <ul style="list-style-type: none"> • Riser Slot #3 supports x16 PCIe lanes, routed from CPU 1 • PCIe 5.0 support for up to 32 GB/s <p>Riser Slot #3 supports the following Intel riser card options:</p> <ul style="list-style-type: none"> • Two PCIe slot riser card (iPC FCP2URISER3STD), which support: <ul style="list-style-type: none"> ○ Two LP/HL single-width slots (x16 mechanical, x8 electrical) • NVMe riser card (iPC CYPRISER3RTM), which supports: <ul style="list-style-type: none"> ○ Two PCIe NVMe SlimSAS connectors with re-timers
PCIe* NVMe* Support	<ul style="list-style-type: none"> • Supports up to 18 PCIe NVMe interconnects <ul style="list-style-type: none"> ○ 16 server board MCIO connectors, eight per processor ○ Two M.2 NVMe/SATA connectors • Additional NVMe support through select Riser Card options (see Riser Card Support) • Volume Management Device (VMD) support
Video Support	<ul style="list-style-type: none"> • Integrated 2D video controller • 128 MB of DDR4 video memory • One VGA connector on the rear of the chassis
Onboard SATA Support	<ul style="list-style-type: none"> • 10 x SATA III ports (6 Gb/s, 3 Gb/s, and 1.5 Gb/s transfer rates supported) <ul style="list-style-type: none"> ○ Two M.2 connectors: SATA/PCIe ○ Two 4-port Mini-SAS HD (SFF-8643) connectors
USB Support	<ul style="list-style-type: none"> • One USB 3.0 and two USB 2.0 connectors on the rear of the chassis • One USB 3.0 and one USB 2.0 connector on the front panel
Serial Support	<ul style="list-style-type: none"> • One external RJ-45 Serial Port A connector on the rear of the chassis
Front Drive Bay Options	<ul style="list-style-type: none"> • 8 x 2.5" SAS/SATA/NVMe hot swap drive bays – iPC M50FCP2UR208 • 16 x 2.5" SAS/SATA/NVMe hot swap drive bays - iPC M50FCP2UR208 with installed accessory kits • 24 x 2.5" SAS/SATA/NVMe hot swap drive bays - iPC M50FCP2UR208 with installed accessory kits • 12 x 3.5" SAS/SATA hot swap drive bays (supports up to 4 NVMe drives) - iPC M50FCP2UR312
Server Management	<ul style="list-style-type: none"> • Integrated Baseboard Management Controller (BMC) • One dedicated RJ45 1 GbE server management port • Intelligent Platform Management Interface (IPMI) 2.0 compliant • Redfish* compliant • Support for Intel® Data Center Manager (Intel® DCM) • Support for Intel® Server Debug and Provisioning Tool (Intel® SDP Tool) • Support for Intel® Server Management Software • Intel® Light-Guided Diagnostics • Optional Advanced Server Management features (Purchased separately)

Feature	Details
Server Management Processor (SMP)	<ul style="list-style-type: none"> • Aspeed AST2600* Advanced PCIe Graphics and Remote Management Processor • Embedded features enabled on this server board: <ul style="list-style-type: none"> ○ Baseboard Management Controller (BMC) ○ 2D Video Graphics Adapter
System Configuration and Recovery Jumpers	<ul style="list-style-type: none"> • BIOS load defaults • BIOS password clear • Intel® Management Engine firmware force update Jumper • BIOS_SVN downgrade • BMC_SVN downgrade
Security Support	<ul style="list-style-type: none"> • Intel® Platform Firmware Resilience (Intel® PFR) technology with an I2C interface • Intel® Software Guard Extensions (Intel® SGX) • Converged Intel® Boot Guard and Trusted Execution Technology (Intel® TXT) • Intel® Total Memory Encryption – Multi-Key (Intel® TME-MK) • Trusted platform module 2.0 (China version) – iPC AXXTPMCHNE8 (accessory option) • Trusted platform module 2.0 (rest of the world) – iPC AXXTPMENC9 (accessory option)
Supported Rack Mount Kit Accessory Options (Sold separately)	<p>CYPHALFEXTRAIL – Value rack mount rail kit</p> <p>CYPFULLEXTRAIL – Premium rail kit with cable management arm (CMA) support</p> <p>AXXCMA2 – CMA (supports CYPFULLEXTRAIL only)</p>
BIOS	Unified Extensible Firmware Interface (UEFI)-based BIOS (legacy boot not supported)

1.8 Available Server Board, Chassis, and System SKU Summary

The following tables provide an overview of available Intel product codes for the server board and systems within the Intel® Server M50FCP Family. Each line item identifies key features supported in the shipping Intel SKU. Additional order code information and full product descriptions for each option are provided in later sections.

The following terms are used in the tables:

- **N/A:** Not applicable.
- **Opt.:** Accessory option sold separately.
- **No:** Not Included
- **Yes:** Included.
- **L3:** Server system building block – server board only.
- **L6:** Integrated system – chassis and server board, with no processors, memory, power supply, or storage devices.

Table 7. Server Board (L3) Family Summary

Intel Product Code (iPC)	# Of CPU Sockets	# Of DIMM Slots	# Of Riser Slots	Onboard SATA ports (6 Gb)	Onboard NVMe* Ports	Intel® RAID Module (SAS) support	Intel® Ethernet Network Adapter for OCP* Support	Onboard Video	Onboard System Fan connectors	EVAC Heat Sink Support
M50FCP2SBSTD	2	32	3	8	8	Opt.	Opt.	Yes	6	No

Table 8. Server System (L6 BIK) Family Summary

Intel Product Code (iPC)	Chassis Form Factor	Server Board Option	Drive Form Factor	# Of Drive Bays (front)	2.5" NVMe* Support	# of SSD Drives (internal fixed)	# of PCIe* Add-in Card Slots	Power Supply Modules	Rails	Memory Included	Processor Included
M50FCP1UR212	1U	M50FCP2SBSTD	2.5"	12	Opt. (up to 12)	N/A	3	Opt. (up to 2)	Opt.	No	No
M50FCP1UR204	1U	M50FCP2SBSTD	2.5"	4	Opt. (up to 4)	N/A	3	Opt. (up to 2)	Opt.	No	No
M50FCP2UR208 ²	2U	M50FCP2SBSTD	2.5"	8, 16, 24	Opt. (up to 24)	Opt. (up to 2)	8	Opt. (up to 2)	Opt.	No	No
M50FCP2UR312	2U	M50FCP2SBSTD	3.5"	12	Opt. (up to 4)	Opt. (up to 2)	8	Opt. (up to 2)	Opt.	No	No

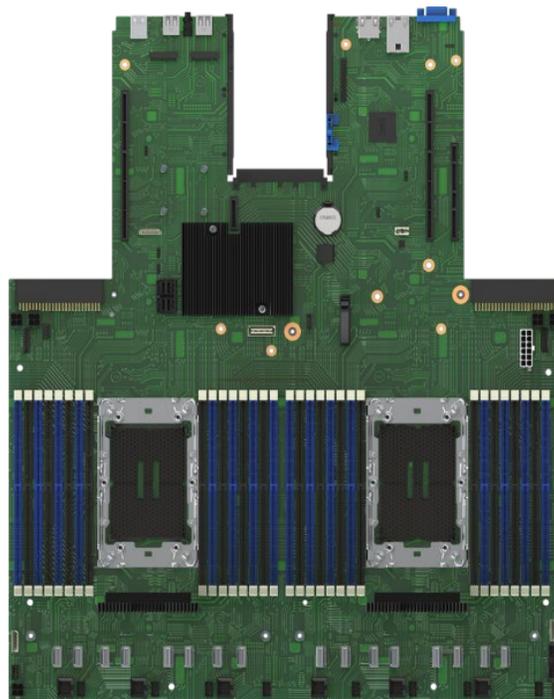
² As ordered, the 2U M50FCP2UR208 system SKU supports 8 front drive bays. The system can support configurations of 16 and 24 front drive bays with optionally installed accessory kits. See section 4.5.2 and section 4.5.3.

2. Server Building Block Options

Intel server building blocks are offered to provide the option of developing a custom server system using an Intel server board and other supported Intel accessories. Each Intel building block option is purchased separately and assembled by a system integrator.

At a minimum, a base functional server system using building blocks requires the following:

- Custom or 3rd party Rack Mount Server Chassis – not sold by Intel
- Rack mount kit
- Intel® Server Board M50FCP2SBSTD
- Power supply module(s) and Power cord(s)
- Processor Assembly
 - Processor(s) – 4th Gen Intel® Xeon® Scalable processor family
 - Processor Heat Sink(s)
 - Processor Mounting Clip(s)
- DDR5 DIMMs



Intel® Server Board M50FCP2SB



Power supply module



PCIe* riser card

Figure 14. Intel Server Building Block Options


Optional accessories that can be added include the following:

- Intel PCIe riser card options
- Storage devices
- Proper storage device interface cables
- Intel® Integrated RAID Module with SAS support –PCIe add-in card and appropriate SAS data cable(s)
- Intel® Ethernet Network Adapter for OCP –to add additional features without losing a PCIe add-in slot

See [Chapter 5](#) for all available options.

2.1 Intel® Server Board M50FCP2SBSTD

Table 9. Intel® Server Board M50FCP2SBSTD

Product Image	Details	Description
	<p>Intel® Server Board M50FCP2SBSTD</p> <p>iPC M50FCP2SBSTD MM# 99AN21 UPC 00735858534260 EAN 5032037265843 MOQ 5</p> <p>Product type Server board only. Building block / spare FRU</p> <p>Packaged gross wt. 40.2 lbs. Un-packaged net wt. 4.95 lbs. (single board)</p>	<p>See Table 4 for the complete feature set. Unique board features include:</p> <ul style="list-style-type: none"> • (2) Processor sockets • (32) memory slots, 16 per processor • (3) PCIe Riser Card slots • (1) OCP 3.0 Small Form Factor slot • (16) – Server board PCIe MCIO connectors, eight per processor – NVMe support • (10) – Eight SATA 6 Gbps ports + two M.2 SSD ports • (6) 6-pin managed system fan connectors • (8) 8-pin managed system fan connectors • (2) CPU fan headers (one for each CPU) • Support for Intel® Optane™ PMem 300 Series modules (App Direct mode support only) • Intel® C741 chipset PCH <p>Box includes: (5) server boards</p> <p>Note: All necessary mounting hardware, cabling, and shielding ship with the chassis and optional accessory kits.</p>

3. Server System Configurations

The Intel® Server M50FCP Family includes several 1U and 2U rack mount server systems with different front drive bay configurations. All systems include an integrated server board, backplane, system fans, and other components designed for proper cooling and airflow within the chassis. All systems are integrated to an L6 level, meaning that additional components must be ordered and integrated into the system to make it power on ready. At a minimum, building a functional server from one of these L6 configuration options requires the following components, which must be ordered separately from the system.

- Intel rack mount rail kit
- 1 or 2 Intel power supply modules with power cords
- 1 or 2 Intel processor(s) – 4th Gen Intel® Xeon® Scalable processor family
- Up to 32 DDR5 DIMMs
- Storage drives
- Appropriate Intel cable kit(s) for data interface to the backplane from the server board



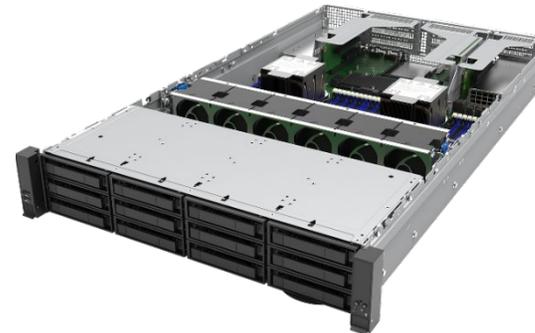
Intel® Server System M50FCP1UR204



Intel® Server System M50FCP1UR212



Intel® Server System M50FCP2UR208



Intel® Server System M50FCP2UR312

Figure 15. L6 Integrated System Options

Optional Intel accessories can be added to enhance the base system configuration:

- PCIe riser cards
- 2U 2.5" Front Drive Bay Expansion Accessory Kits
- Intel® RAID support – PCIe add-in card or module and appropriate SAS interface cable(s)
- Intel® RAID Maintenance Free Backup Unit –Intel RAID backup accessory
- Intel® Ethernet Network Adapters

See the product tables in the following sections for a complete list of parts included with each system option.

See [Chapter 5](#) and [Chapter 6](#) for a full list of available options.

3.1 Intel® Server System M50FCP1UR – 1U Rack Mount System

The product tables found in this section provide order code information and detailed descriptions for each available 1U Intel server system option. The bottom section of each table includes columns for:

- **Included** –The ship along components of the specified chassis product code (product BOM).
- **Required items** – Hardware that must be ordered separately from the system and installed by a system integrator for the system to attain basic power on functionality and rack installation.
- **Optional accessories** – Lists some of the available accessory options that can be installed to enhance the base feature set of the system. Optional accessories are sold separately. All supported accessories are listed in [Chapter 5](#).

Note: The “Included” column of the product tables identify the following for each listed component: (Quantity included), Description, and either an iPC or iPN. An Intel Product Code (iPC) is an orderable part that Intel offers as a spare or accessory. An Intel Part Number (iPN) is a component that is not orderable but provided in the table for reference purposes only.

This product family offers one level of server system integration:

- **L6** – Integrated system: These systems are not power on ready as received. Additional components must be purchased separately and integrated into the system, making it ready for use.

Table 10. Intel® Server System M50FCP1UR204 Specifications and Configuration Requirements

Intel® Server System M50FCP1UR204				
1U, Intel® Server Board M50FCP2SBSTD, 4 x 2.5" SAS / SATA / NVMe SSD front mount drive bays				
	iPC	M50FCP1UR204	Product type	L6 integrated system
	MM#	99AN20	Chassis form factor	1U rack mount
	UPC	00735858530187	Packaged gross wt.	TBD
	EAN	5032037261760	Un-packaged net wt.	TBD
	MOQ	1	Chassis dimensions	767 x 438.5 x 43 mm (L x W x H)
			Package dimensions (outer box)	994 x 592 x 300 mm (L x W x H)
Included	Required Items (sold separately)	Optional Accessories (sold separately)		
(1) – 1U 2.5" chassis – iPN M36832-xxx (1) – Server board – iPC M50FCP2SBSTD (1) – 4 drive hot-swap drive bay assembly (1) 4 x 2.5" combo HSBP – iPC CYPHSBP1204 (4) Drive mounting rails – iPN K53035-xxx (4) 2.5" SSD blank – iPN K71491- xxx (1) I ² C cable from server board to HSBP – iPN K63232- xxx (1) Power cable from server board to HSBP – iPN K61358- xxx (1) – Riser #1 Assembly (1) Riser #1 Bracket (1) 1-Slot x16 LP PCIe riser card (Riser Slot #1) – iPC FCP1URISER1 (1) – Riser #2 Bracket - iPN K72604-001 (1) – Front panel (left) with two USB ports – iPN K48177- xxx (1) – Front Panel (left) USB cable– iPN K67061- xxx (1) – Front panel (right) with control panel – iPN K48178- xxx (1) – Front panel (right) cable pin – iPN K67060- xxx (8) – Dual-rotor system fans – iPC CYPFAN1UKIT (16) – DIMM slot blanks – iPN M45676- xxx (2) – EVAC CPU heat sinks – iPC FCP1UHSEVAC (2) – E1A (XCC) processor clips – iPC AXSPRXCCCC (2) – E1B (MCC) processor clips – iPC AXSPRMCCCC (1) – Air baffle (left) – iPN K72602- xxx (1) – Air baffle (right) – iPN K72603- xxx (1) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket	<ul style="list-style-type: none"> • (1) or (2) power supply module(s) – See Section 5.5 • Power cord(s) – See Section 5.5 • Rack mount kit – See Section 5.6 • (1) or (2) 4th Gen Intel® Xeon® Scalable processor(s) • ECC registered DDR5 DIMMs 	The following is a partial list of supported accessories. See Chapter 5 and Chapter 6 for all available accessory options. <ul style="list-style-type: none"> • Backplane compatible storage drives – NVMe, SATA, SAS • Front drive bay data Interface cables. See Chapter 4 • 2nd Riser Card • Intel® Ethernet Network Adapter for OCP – See Section 5.3 for available options • Intel® Optane™ PMem 300 series module 		

Table 11. Intel® Server System M50FCP1UR212 Specifications and Configuration Requirements

Intel® Server System M50FCP1UR212		
1U, Intel® Server Board M50FCP2SBSTD, 12 x 2.5" SAS / SATA / NVMe SSD front mount drive bays		
	<p>iPC M50FCP1UR212 MM# 99AN22 UPC 00735858530194 EAN 5032037261777 MOQ 1</p>	<p>Product type L6 integrated system Chassis form factor 1U rack mount Packaged gross wt. TBD Un-packaged net wt. TBD Chassis dimensions 767x 438.5 x 43 mm (L x W x H) Package dimensions 994 x 592 x 300 mm (L x W x H)</p>
Included	Required Items (sold separately)	Optional Accessories (sold separately)
<p>(1) – 1U 2.5" chassis – iPN M36832-xxx (1) – Server board – iPC M50FCP2SBSTD (1) – 12 drive hot-swap drive bay assembly (1) 12 x 2.5" combo HSBP – iPC CYPHSBP1212 (12) SSD mounting rail with extraction levers – iPN K71493-xxx (12) 2.5" drive blanks – iPN K71491-xxx (1) I2C cable from server board to HSBP – iPN K63231-xxx (1) power cable from server board to HSBP – iPN K61358-xxx (1) – Riser #1 Assembly (1) Riser #1 Bracket (1) 1-Slot x16 LP PCIe riser card (Riser Slot #1) – iPC FCP1URISER1 (1) – Riser #2 Bracket - iPN K72604-001 (1) – Front panel (left) with two USB ports – iPN K48177- xxx (1) – Front Panel (left) USB cable– iPN K67061- xxx (1) – Front panel (right) with Control Panel – iPN K48178- xxx (1) – Front panel (right) cable pin – iPN K67060- xxx (8) – Dual-rotor system fans – iPC CYPFAN1UKIT (16) – DIMM slot blanks – iPN M45676- xxx (2) –Standard 1U heat sink- – iPC FCP1UHSSTD (2) – E1A (XCC) processor clips – iPC AXSPRXCCCC (2) - E1B (MCC) processor clips - iPC AXSPRMCCCC (1) – Air baffle (left) – iPN K72602- xxx (1) – Air baffle (right) – iPN K72603- xxx (1) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket</p>	<ul style="list-style-type: none"> • (1) or (2) power supply module(s) – See Section 5.5 • Power cord(s) – See Section 5.5 • Rack mount kit – See Section 5.6 • (1) or (2) 4th Gen Intel® Xeon® Scalable processor(s) • ECC registered DDR5 DIMMs 	<p>The following is a partial list of supported accessories. See Chapter 5 and Chapter 6 for all available accessory options.</p> <ul style="list-style-type: none"> • Backplane compatible storage drives – NVMe, SATA, SAS • Front drive bay data Interface cables. See Chapter 4 • 2nd Riser Card • Intel® Ethernet Network Adapter for OCP – See Section 5.3 for available options • Intel® Optane™ PMem 300 series modules

3.2 Intel® Server System M50FCP2UR – 2U Rack Mount System

The product tables found in this section provide order code information and detailed descriptions for each available 2U Intel server system option. The bottom section of each table includes columns for:

- **Included** – The ship along components of the specified chassis product code (product BOM).
- **Required items** – Hardware that must be ordered separately from the system and installed by a system integrator for the system to attain basic power on functionality and rack installation.
- **Optional accessories** – Lists some of the available accessory options that can be installed to enhance the base feature set of the system. Optional accessories are sold separately. All supported accessories are listed in [Chapter 5](#).

Note: The “Included” column of the product tables identify the following for each listed component: (Quantity included), Description, and either an iPC or iPN. An Intel Product Code (iPC) is an orderable part that Intel offers as a spare or accessory. An Intel Part Number (iPN) is a component that is not orderable but provided in the table for reference purposes only.

This product family offers one level of server system integration:

- **L6** – Integrated system: These systems are not power on ready as received. Additional components must be purchased separately and integrated into the system, making it ready for use.

Table 12. Intel® Server System M50FCP2UR208 Specifications and Configuration Requirements

Intel® Server System M50FCP2UR208		
2U, Intel® Server Board M50FCP2SBSTD, 8 x 2.5" SSD SAS/SATA front mount drives		
	<p>iPC M50FCP2UR208 MM# 99AN24 UPC 00735858530200 EAN 5032037261784 MOQ 1</p>	<p>Product type L6 integrated system Chassis form factor 2U rack mount Packaged gross wt. TBD Un-packaged net wt. TBD Chassis dimensions 769.6 x 438 x 87 mm (L x W x H) Package dimensions 994 x 592 x 300 mm (L x W x H)</p>
Included	Required Items (sold separately)	Optional Accessories (sold separately)
<p>(1) – 2U 2.5" Chassis – iPN M36826-xxx (1) – Server board – iPC M50FCP2SBSTD (1) – 8 drive hot-swap drive bay assembly (1) 8 x 2.5" combo HSBP – iPC CYPHSBP2208 (8) 2.5" SSD mounting rails with lever – iPN K71493-xxx (8) 2.5" drive blanks – iPN K71491-xxx (1) power cable, for 3x HSBPs – iPN K62572-xxx (1) I²C cable, server board to HSBP – iPN K63232-xxx (2) – Riser card assembly brackets (1) – Front panel (left) with two USB ports – iPN K48177-xxx (1) – Front Panel (left) USB cable – iPN K67061-xxx (1) – Front panel (right) with control panel – iPN K48178-xxx (1) – Front panel (right) cable pin – iPN K67059-xxx (6) – Single-rotor system fans – iPC CYPFAN2UKIT (16) – DIMM blanks – iPN M45676-xxx (1) – Standard 2U air duct (for 2U-Tall HS) – iPC FCPDUCTSTD (2) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket (2) – E1A (XCC) processor clips – iPC AXSPRXCCCC (2) – E1B (MCC) processor clips – iPC AXSPRMCCCC</p>	<ul style="list-style-type: none"> • (1) or (2) power supply modules & power cord(s) – See Section 5.5 • Rack mount kit – See Section 5.6 • (1) or (2) 2U CPU heat sink – See Chapter 6 • (1) or (2) 4th Gen Intel® Xeon® Scalable processor(s) • Up to 32 ECC registered DDR5 DIMMs 	<p>The following is a partial list of supported accessories. See Chapter 5 and Chapter 6 for all available accessory options.</p> <ul style="list-style-type: none"> • PCIe Riser Cards – See Section 5.2 • Backplane compatible storage drives – NVMe, SATA, SAS • Front drive data interface cables – See Chapter 4 • Intel® Ethernet Network Adapter for OCP – See Section 5.3 • Intel® Optane™ PMem 300 series module • Front drive bay expansion to 16 or 24 drives – See Sections 4.5.2 & 4.5.3 • 1U CPU Heat Sink and 1U Heat sink compatible air duct See Chapter 6

Table 13. Intel® Server System M50FCP2UR312 Product Specifications and Configuration Requirements

Intel® Server System M50FCP2UR312		
2U, Intel® Server Board M50FCP2SBSTD, 12 x 3.5" SAS/SATA /NVMe front mount drives		
	<p>iPC M50FCP2UR312 MM# 99AN25 UPC 00735858530217 EAN 5032037261791 MOQ 1</p>	<p>Product type L6 integrated system Chassis form factor 2U rack mount Packaged gross wt. TBD Un-packaged net wt. TBD Chassis dimensions 769.6 x 438 x 87 mm (L x W x H) Package dimensions 994 x 592 x 300 mm (L x W x H)</p>
Included	Required Items (sold separately)	Optional Accessories (sold separately)
<p>(1) – 2U 3.5" chassis – iPN M36819-xxx (1) – Server board – iPC M50FCP2SBSTD (1) – 12 drive hot-swap drive bay assembly (1) 12 x 3.5 combo HSBP – iPC CYPHSBP2312 (12) 3.5" HDD/SSD drive carriers – iPN J36447-xxx (1) HSBP power cable – iPN K67596-xxx (1) I²C cable, server board to HSBP – iPN K63231-xxx (2) – Riser card assembly brackets (1) – Front panel (left) with two USB ports – iPN K48177-xxx (1) – Front Panel (left) USB cable – iPN K67061-xxx (1) – Front panel (right) with Control Panel – iPN K48178-xxx (1) – Front panel (right) cable pin – iPN K67059-xxx (6) – Single-rotor system fans – iPC CYPFAN2UKIT (16) – DIMM blanks – iPN M45676-xxx (1) – Standard 2U air duct (for 2U-Tall HS) – iPC FCPDUCTSTD (2) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket (2) – E1A (XCC) processor clips – iPC AXXSPRXCCCC (2) – E1B (MCC) processor clips – iPC AXXSPRMCCCC</p>	<ul style="list-style-type: none"> • (1) or (2) power supply modules & power cord(s) – See Section 5.5 • Rack mount kit – See Section 5.6 • (1) or (2) 2U CPU heat sink – See Chapter 6 • (1) or (2) 4th Gen Intel® Xeon® Scalable processor(s) • Up to 32 ECC registered DDR5 DIMMs 	<p>The following is a partial list of supported accessories. See Chapter 5 and Chapter 6 for all available accessory options.</p> <ul style="list-style-type: none"> • PCIe Riser Cards – See Section 5.2 • Backplane compatible storage drives – NVMe, SATA, SAS • Front drive data interface cables – See Chapter 4 • Intel® Ethernet Network Adapter for OCP – See Section 5.3 • Intel® Optane™ PMem 300 series module • 1U CPU Heat Sink and 1U Heat sink compatible air duct See Chapter 6

4. Front Drive Bay – Drive Interface Data Cable Guide

Drive interface cables for the front drive bay are not included with any of the L6 integrated server systems. They must be ordered separately to match the desired system configuration.

Figure 17 through Figure 20 show the back side of the 1U and 2U backplane options. The backside of each backplane has a four-port SFF-8643 Mini-SAS HD data connector for each set of four SAS/SATA drives. The back side of each backplane also includes either x4 (1 drive) or x8 (2 Drive) PCIe SlimSAS* connectors to support PCIe NVMe drives. Drive numbers in the cable configuration tables match the specific cable connectors found on the given backplane.

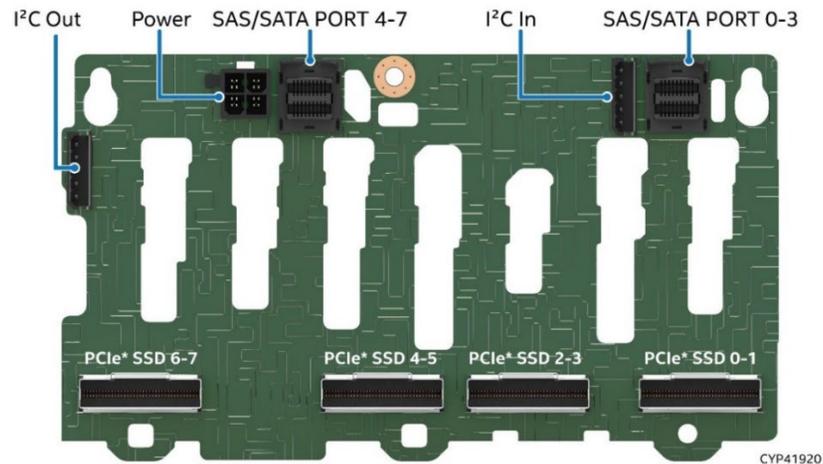


Figure 16. 2U 8 x 2.5" SAS / SATA / NVMe* Hot-Swap Backplane – Back Side

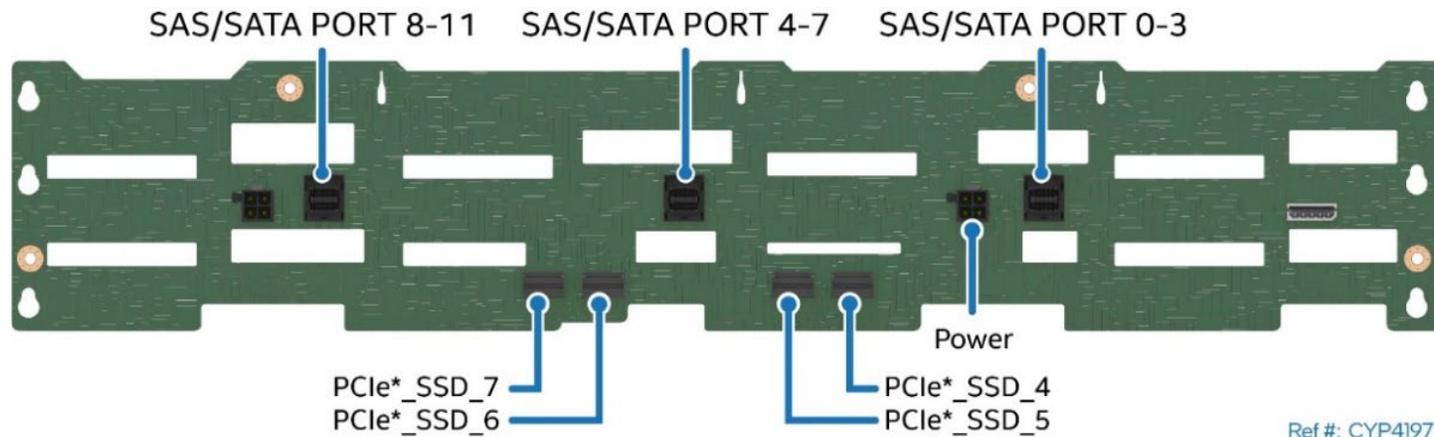


Figure 17. 2U 12 x 3.5" HSBP Connector Identification – Back Side

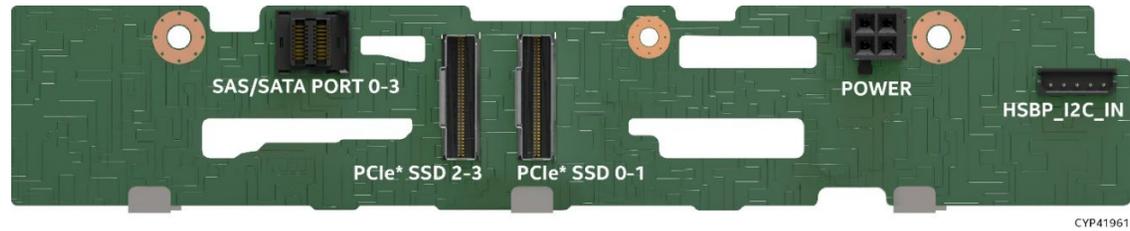


Figure 18. 1U 4 x 2.5" SAS / SATA / NVMe* Hot Swap Backplane – Back Side

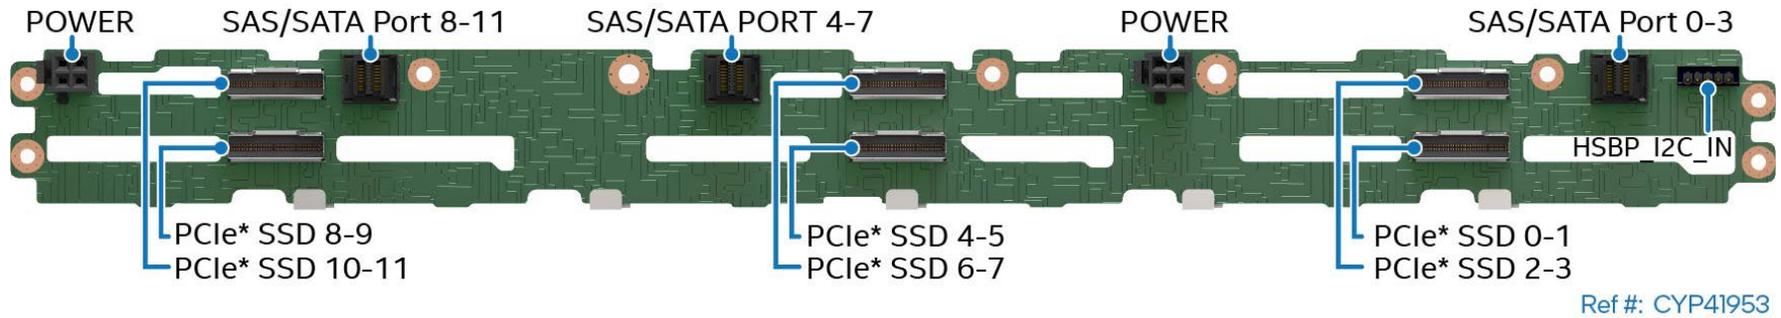


Figure 19. 1U 12 x 2.5" SAS / SATA / NVMe* Hot Swap Backplane – Back Side

4.1 Data Cable Connector Types

Table 14. Multiport Mini-SAS HD Interface Connectors

Image	Description
	<p>SFF-8643 (Mini-SAS HD) Support for up to 12 Gb/s SAS Where used: On the server board – (2) 4-port SATA connectors (SATA 0–3 and SATA 4–7) All 12 Gb/s SAS capable hot-swap backplanes All 12 Gb/s SAS RAID controllers 12 Gb/s SAS expander card</p>


Table 15. x4 PCIe* SlimSAS* Interface Connectors

Image	Description
	<p>x4 SlimSAS* connectors Support for PCIe NVMe SFF (2.5") SSDs</p> <p>Where used: On 2U 3.5" SAS/SATA/NVMe backplane</p>

Table 16. x4 PCIe* MCIO Interface Connectors

Image	Description
	<p>x4 MCIO connectors Support for PCIe NVMe SFF (2.5") SSDs</p> <p>Where used: On the server board – 16 connectors (8 per processor)</p>

Table 17. x8 PCIe* Interface Connectors

Image	Description
	<p>x8 SlimSAS* connector Support for PCIe NVMe SFF (2.5") SSDs</p> <p>Where used: HSBP options: 4 x 2.5" SAS/SATA/NVMe hot-swap backplane 12 x 2.5" SAS/SATA/NVMe hot-swap backplane 8 x 2.5" Drive SAS/SATA/NVMe combo backplane</p> <p>Riser card options: 1U / 2U PCIe NVMe riser card, Riser Slot #3 – iPC CYPRISER3RTM</p>
	<p>x8 MCIO connector Support for PCIe NVMe SFF (2.5") SSDs</p> <p>Riser card options: PCIe NVMe riser card for Riser Slot #1 – iPC FCP2URISER1RTM Interposer riser card option – iPC FCP1URISER2KIT</p>

4.2 1U / 2U Server System SAS / SATA / NVMe* Cable Kits

Product tables in this section reference specific SAS/SATA and NVMe cables. Different cable kits are offered to support specific system configurations. The product order code for each cable kit is made up of a string of letters and numbers to identify the type of cable included in the kit.

The following table identifies the different data cable connector types and the identifiers used in the cable kit product codes.

Table 18. Data Cable Connector Identification

Connector Image	Cable Connector Type	Description
	RA Mini-SAS HD	Right angle SFF-8643 (Mini-SAS HD) connector
	VT Mini-SAS HD	Straight/vertical SFF-8643 Mini-SAS HD connector
	RS Mini-SAS HD	Right side SFF-8643 Mini-SAS HD connector
	LS Mini-SAS HD	Left side SFF-8643 Mini-SAS HD connector
	VT x4 MCIO	Straight/vertical x4 MCIO PCIe NVMe connector
	VT x4 SlimSAS*	Straight/vertical x4 SlimSAS PCIe NVMe connector
	RA x4 SlimSAS	Right angle x4 SlimSAS PCIe NVMe connector
	RRA x4 SlimSAS	Reversed right angle x4 SlimSAS PCIe NVMe connector
	VT x8 SlimSAS	x8 SlimSAS PCIe NVMe connector
	VT x8 MCIO	X8 MCIO PCIe NVMe connector

4.2.1 Cable Kit Product Code Decoder Examples

Abbreviation	Description
CBL	Cable
Kit	Data cable kit
FCP	Intel® Server M50FCP Family
RT	Riser with re-timer
HD	Mini-SAS HD connector
SL	SlimSAS* connector
MCIO	MCIO connector

Examples:

iPC **CYPCBLHDHDX1** – SAS/SATA data cable

- CBL – Identifies a cable kit
- HDHD – Identifies that both ends of the cable are Mini-SAS HD SFF-8643 type connector

iPC **CBLMCSL1204KIT** – NVMe cable

- CBL – Identifies a cable
- MC – Identifies that one end of the cable has MCIO connector
- SL – Identifies that one end of the cable has SlimSAS connector
- 1204 – Identifies that the cable kit is for 1U, dual-socket, x4 front drive bay system
- KIT – identifies that this is offered as a kit

4.2.2 Cable Kit Order Information

Note: A splitter cable is a cable that has two or more connectors on one end.

Table 19. SAS/SATA/NVMe* Data Cable Kit Description and Order Information

Image	Order Information	Product Description
	<p>iPC CBLMCSL1204KIT MM# 99AN8A UPC 735858517690 EAN 5032037250924 MOQ 1</p>	<p>Used in 1U systems as spare or accessory.</p> <p>Kit includes:</p> <p>(1) – 210/220-mm splitter cable, connects server board CPU0 x4 MCIO 4A and 4B (VT) to HSBP x8 SlimSAS* SSD0-1 (VT)</p> <p>(1) – 285/295-mm splitter cable, connects server board CPU1 x4 MCIO 3A and 3B (VT) to HSBP x8 SlimSAS SSD2-3 (VT)</p>
	<p>iPC CBLMCSL1212KIT MM# 99AN85 UPC 735858517645 EAN 5032037250870 MOQ 1</p>	<p>Used in 1U systems as spare or accessory.</p> <p>Kit includes:</p> <p>(1) – 275/285-mm splitter cable, connects server board CPU0 x4 MCIO 3A and 3B (VT) to HSBP x8 SlimSAS SSD0-1 (VT)</p> <p>(1) – 335/345-mm splitter cable, connects server board CPU0 x4 MCIO 3C and 3D (VT) to HSBP x8 SlimSAS SSD2-3 (VT)</p> <p>(1) – 210/220-mm splitter cable, connects server board CPU0 x4 MCIO 4A and 4B (VT) to HSBP x8 SlimSAS SSD4-5 (VT)</p> <p>(1) – 285/295-mm splitter cable, connects server board CPU0 x4 MCIO 4C and 4D (VT) to HSBP x8 SlimSAS SSD6-7 (VT)</p> <p>(1) – 255/245-mm splitter cable, connects server board CPU1 x4 MCIO 4A and 4B (VT) to HSBP x8 SlimSAS SSD8-9 (VT)</p> <p>(1) – 285/295-mm splitter cable, connects server board CPU1 x4 MCIO 4C and 4D (VT) to HSBP x8 SlimSAS SSD10-11 (VT)</p>

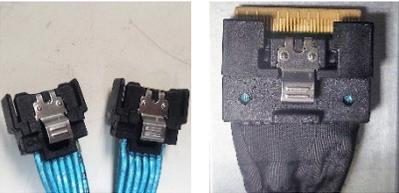
Image	Order Information	Product Description
	<p>iPC CBLMCSL2208KIT MM# 99AN86 UPC 735858517652 EAN 5032037250887 MOQ 1</p>	<p>Used in 2U systems as spare or accessory.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – 255/235-mm splitter cable, connects server board CPU0 x4 MCIO 4A and 4B (VT) to HSBP x8 SlimSAS* SSD0-1 (VT) (1) – 270/260-mm splitter cable, connects server board CPU0 x4 MCIO 4C and 4D (VT) to HSBP x8 SlimSAS SSD2-3 (VT) (1) – 240/220-mm splitter cable, connects server board CPU1 x4 MCIO 3A and 3B (VT) to HSBP x8 SlimSAS SSD4-5 (VT) (1) – 265/240-mm splitter cable, connects server board CPU1 x4 MCIO 3C and 3D (VT) to HSBP x8 SlimSAS SSD6-7 (VT)
	<p>iPC CBLMCSL2216KIT MM# 99AN87 UPC 735858517669 EAN 5032037250894 MOQ 1</p>	<p>Used in 2U systems as spare or accessory.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1)– 230/220-mm splitter cable, connects server board CPU0 x4 MCIO 3A and 3B (VT) to HSBP (left) x8 SlimSAS SSD4-5 (VT) (1)– 255/235-mm splitter cable, connecting server board CPU0 x4 MCIO 3C and 3D (VT) to HSBP (left) x8 SlimSAS SSD6-7 (VT) (1)– 310/290-mm splitter cable, connects server board CPU0 x4 MCIO 4A and 4B (VT) to HSBP (left) x8 SlimSAS SSD0-1 (VT) (1)– 270/260-mm splitter cable, connecting server board CPU0 x4 MCIO 4C and 4D (VT) to HSBP (left) x8 SlimSAS SSD2-3 (VT) (1)– 245/225-mm splitter cable, connects server board CPU1 x4 MCIO 3A and 3B (VT) to HSBP (right) x8 SlimSAS SSD0-1 (VT) (1)– 240/220-mm splitter cable, connects server board CPU1 x4 MCIO 3C and 3D (VT) to HSBP (right) x8 SlimSAS SSD2-3 (VT) (1)– 240/220-mm splitter cable, connects server board CPU1 x4 MCIO 4A and 4B (VT) to HSBP (right) x8 SlimSAS SSD4-5 (VT) (1)– 275/255-mm splitter cable, connects server board CPU1 x4 MCIO 4C and 4D (VT) to HSBP (right) x8 SlimSAS SSD6-7 (VT)

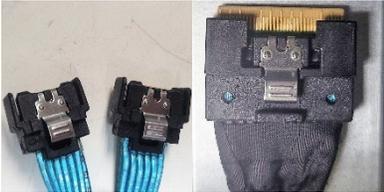

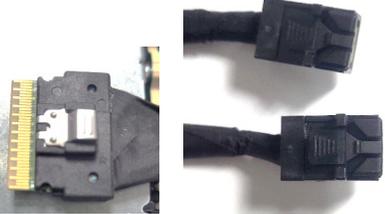
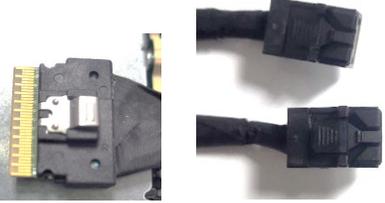
Image	Order Information	Product Description
	<p>iPC CBLMCSL2224KIT MM# 99AW4T UPC 735858517676 EAN 5032037250900 MOQ 1</p>	<p>Used in 2U systems as spare or accessory.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1)– 230/220-mm splitter cable, connects server board CPU0 x4 MCIO 3A and 3B (VT) to HSBP (left) x8 SlimSAS* SSD4-5 (VT) (1)– 255/235-mm splitter cable, connecting server board CPU0 x4 MCIO 3C and 3D (VT) to HSBP (left) x8 SlimSAS SSD6-7 (VT) (1)– 260/240-mm splitter cable, connects server board CPU0 x4 MCIO 4A and 4B (VT) to HSBP (left) x8 SlimSAS SSD0-1 (VT) (1)– 270/260-mm splitter cable, connecting server board CPU0 x4 MCIO 4C and 4D (VT) to HSBP (left) x8 SlimSAS SSD2-3 (VT) (1)– 245/225-mm splitter cable, connects server board CPU1 x4 MCIO 3A and 3B (VT) to HSBP (right) x8 SlimSAS SSD0-1 (VT) (1)– 240/220-mm splitter cable, connects server board CPU1 x4 MCIO 3C and 3D (VT) to HSBP (right) x8 SlimSAS SSD2-3 (VT) (1)– 240/220-mm splitter cable, connects server board CPU1 x4 MCIO 4A and 4B (VT) to HSBP (right) x8 SlimSAS SSD4-5 (VT) (1)– 275/255-mm splitter cable, connects server board CPU1 x4 MCIO 4C and 4D (VT) to HSBP (right) x8 SlimSAS SSD6-7 (VT)
	<p>iPC CBLMCSL2304KIT MM# 99AN88 UPC 735858517683 EAN 5032037250917 MOQ 1</p>	<p>Used in 2U 3.5" systems as spare or accessory.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – 180-mm cable, connects server board CPU0 x4 MCIO 4A connector to HSBP x4 SlimSAS SSD4 connector (1) – 200-mm cable, connects server board CPU0 4x MCIO 4B connector to HSBP x4 SlimSAS SSD5 connector (1) – 280-mm cable, connects server board CPU0 x4 MCIO 4C connector to HSBP x4 SlimSAS SSD6 connector (1) – 310-mm cable, connects server board CPU0 x4 MCIO 4D connector on HSBP x4 SlimSAS SSD7 connector

Image	Order Information	Product Description
	<p>iPC CBLMCSLRTKIT MM# 99AN7Z UPC 00735858517638 EAN 5032037250863 MOQ 1</p>	<p>Used in 2U systems to support additional NVMe* drives in front drive bay.</p> <p>Kit includes: (4) – 660-mm cables</p> <p>Usage in 2U systems: (1) – 660-mm cable, connects Riser #1 NVMe riser card x8 MCIO PCIe_SSD_0-1 connector to HSBP x8 SlimSAS* SSD_0-1 connector (1) – 660-mm cable, connects Riser #1 NVMe riser card x8 MCIO PCIe_SSD_2-3 connector to HSBP x8 SlimSAS SSD_2-3 connector</p> <p>(1) – 660-mm cable, connects Riser #3 x8 SlimSAS connector PCIe_SSD_0-1 to HSBP x8 SlimSAS SSD_4-5 connector (1) – 660-mm cable, connects Riser #3 x8 SlimSAS connector PCIe_SSD_2-3 to HSBP x8 SlimSAS SSD_6-7 connector</p>
	<p>iPC CYPCLSLSLX8 MM# 99AJR4 UPC 00735858487528 EAN 5032037224109 MOQ 1</p>	<p>Used in 1U / 2U systems to support additional NVMe drives in front drive bay.</p> <p>Kit includes: (1) – 860-mm cable, connects add-in card x8 SlimSAS connector to HSBP x8 SlimSAS connector (1) – 1-m cable, connects add-in card x8 SlimSAS connector to HSBP x8 SlimSAS connector</p>
	<p>iPC CYPCLHDHDX1 MM# 99AJF8 UPC 00735858484756 EAN 5032037221511 MOQ 1</p>	<p>Used in 1U / 2U systems to support SAS/SATA drives in front drive bay. Usage varies depending on the front drive bay configuration.</p> <p>Kit includes: (1) – 640-mm cable, connects add-in card Mini-SAS HD connector to HSBP Mini-SAS HD connector (VT to VT) (1) – 840-mm cable, connects add-in card Mini-SAS HD connector to HSBP Mini-SAS HD connector (RA to VT) (1) – 930-mm cable, connects add-in card or server board Mini-SAS HD connector to HSBP Mini-SAS HD connector (RA to VT)</p>

Image	Order Information	Product Description
	<p> iPC CYPCLHDHDX2 MM# 99AJF9 UPC 00735858475235 EAN 5032037213189 MOQ 1 </p>	<p>Used in 1U / 2U x8 systems to support SAS/SATA drives in front drive bay.</p> <p>Kit includes:</p> <p>(1) – 180-mm cable, connects SAS ROC module Mini-SAS HD connector to HSBP Mini-SAS HD port 0–3 connector</p> <p>(1) – 250-mm cable, connects SAS ROC module Mini-SAS HD connector to HSBP Mini-SAS HD port 4–7 connector</p>
	<p> iPC CYPCLSLHDKIT MM# 99AMXX UPC 00735858497350 EAN 5032037232494 MOQ 1 </p>	<p>Used in 1U / 2U systems to connect add-in cards to HSBP.</p> <p>Kit includes:</p> <p>(1) – 860-mm cable, RAID x8 SlimSAS* connector to HSBP x4 Mini-SAS HD connector</p> <p>(1) – 660-mm cable, RAID x8 SlimSAS connector to HSBP x4 Mini-SAS HD connector</p>
	<p> iPC CBLSLHDKIT MM# 99C3FZ UPC 00735858527774 EAN 5032037259767 MOQ 1 </p>	<p>Used in 1U systems to connect add-in cards to HSBP.</p> <p>Kit includes:</p> <p>(1) – 1000-mm cable, RAID x8 SlimSAS connector to HSBP x4 Mini-SAS HD connector</p> <p>(1) – 1120-mm cable, RAID x8 SlimSAS connector to HSBP x4 Mini-SAS HD connector</p>

4.2.3 Cable Recommendations

Each table in the following sections identifies the cable connections and recommended cable lengths for each supported storage controller option in the specified system. Each recommended cable length for a given connector pair provides enough cable to attach the two devices and provides the least amount of excess cable, providing the cleanest cable routing possible.

Refer to the following diagrams when **right** or **left** cable routing is specified for a given cable configuration. All cable recommendations are for a system configured for two processors.

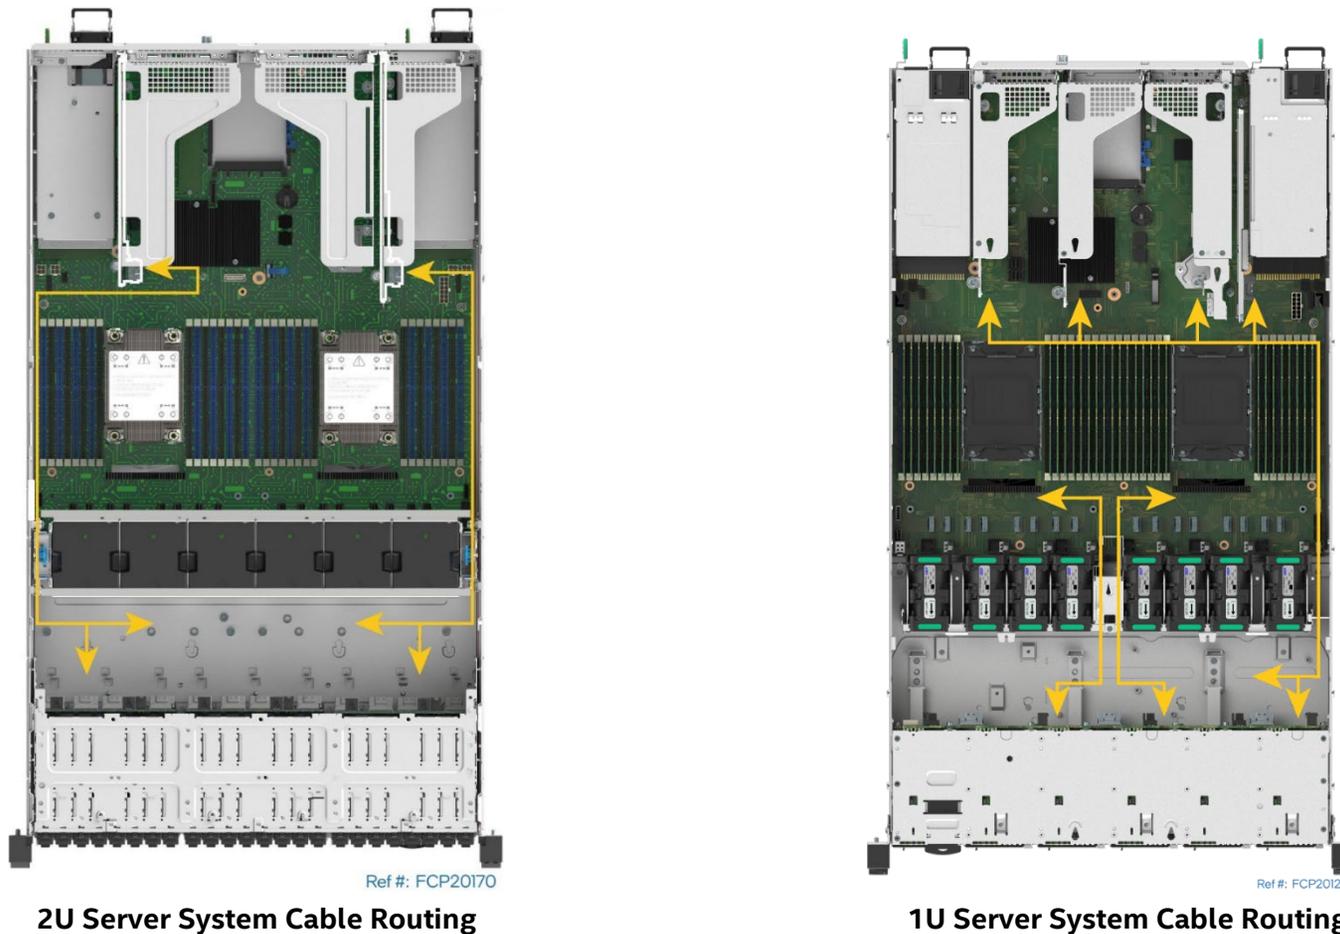


Figure 20. Server System Cable Routing

4.3 1U 4 x 2.5" – M50FCP1UR204 SAS /SATA / NVMe* Data Cable Guide



Figure 21. 4 x 2.5" Front Drive Bay Configuration – M50FCP1UR204

Note: A splitter cable is a cable that has two or more connectors on one end.

Table 20. Data Cable Guide for Intel® Server System M50FCP1UR204

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 to backplane SATA 0–3	Routed along the right side of chassis	CYPCBLHDHDX1	840-mm cable, RA → VT
SAS / SATA RAID	PCIe SAS RAID add-in card	Riser 1, 2, PCIe interposer add-in card SATA 0–3 to backplane SATA 0–3	Routed along the right side of chassis	CBLSHDKIT	1000/1120-mm cable, VT → VT
NVMe*	Server board	Server board MCIO to backplane SlimSAS*	Routed through middle of fan assembly	CBLMCSL1204KIT	For more details on cable connections, see Table 19 .
NVMe	PCIe tri-mode RAID add-in card	Riser 1,2, PCIe interposer card add-in card to backplane		N/A	Configuration not supported
NVMe	NVMe riser card	Riser 3 to backplane		N/A	Configuration not supported

Notes: (1) All cables are routed along the chassis right side. (2) In an M50FCP1UR204 system, riser 3 slot does not support add-in cards.

4.4 1U 12 x 2.5" – M50FCP1UR212 SAS / SATA / NVMe* Data Cable Guide



Figure 22. 12 x 2.5" Front Drive Bay Configuration – M50FCP1UR212

Note: A splitter cable is a cable that has two or more connectors on one end.

Table 21. Data Cable Guide for Intel® Server System M50FCP1UR212

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 to backplane SATA 4–7 routed	Routed along right side of chassis	CYPCBLHDHDX1	930-mm cable, RA → VT
SATA		Server board SATA 4–7 to backplane SATA 8–11 routed	Routed along right side of chassis		840-mm cable, RA → VT
SAS / SATA RAID	PCIe SAS RAID add-in card	Riser 2 add-in card SATA 0 to backplane SATA 0–3	Routed along right side of chassis	CBLSLHDKIT	1000-mm cable, VT → VT
SAS / SAS RAID		Riser 2 add-in card SATA 1 to backplane SATA 4–7	Routed along right side of chassis	CYPCBLSLHDKIT	860-mm cable, VT → VT
SAS / SAS RAID		Riser 2 add-in card SATA 2 to backplane SATA 8–11	Routed along right side of chassis		660-mm cable, VT → VT
SAS / SAS RAID		Riser 1 or interposer add-in card SATA 0 to backplane SATA 0–3	Routed along right side of chassis	CBLSLHDKIT	1120-mm cable, VT → VT
SAS / SAS RAID		Riser 1 or interposer add-in card SATA 0 to backplane SATA 4–7	Routed along right side of chassis		1000-mm cable, VT → VT
SAS / SAS RAID		Riser 1 or interposer add-in card SATA 1 to backplane SATA 8–11	Routed along right side of chassis		1000-mm cable, VT → VT
NVMe*	Server board	Server board MCIO to backplane SlimSAS*	Routed under the fan assembly.	CBLMCSL1212KIT	For more details on cable connections, see Table 19 .
NVMe	NVMe riser card	Riser 3 NVMe riser card to backplane		N/A	Configuration not supported

Note: In an M50FCP1UR system, riser 3 slot does not support add-in cards.

4.5 2U 2.5" Front Mount Drive Bay Cable Guide

The 2U 2.5" system can support up to 24 front drive bays using three 8 x 2.5" SAS / SATA NVMe drive combo backplanes.

The 2U 2.5" system supports the following system configurations: 8 drives (M50FCP2UR208), 16 drives (M50FCP2UR208 + 8 drive accessory kit), or 24 drives (M50FCP2UR208 + two 8 drive accessory kits).

The front side of the backplane includes eight 68-pin SFF-8639 drive interface (U.2) connectors, each capable of supporting SAS, SATA, or NVMe drives. The connectors are labeled `SSD_0` through `SSD_7`.

The backside of the backplane includes two multipoint Mini-SAS HD connectors labeled `SAS/SATA PORT 0-3` and `SAS/SATA PORT 4-7`; and four x8 PCIe SlimSAS connectors, labeled `PCIe SSD 0-1`, `PCIe SSD 2-3`, `PCIe SSD 4-5`, and `PCIe SSD 6-7`. Each x8 PCIe SlimSAS connector is routed to two U.2 connectors on the front side. For example, `PCIe SSD 0-1` is routed to `SSD_0` and `SSD_1`.

4.5.1 M50FCP2UR208 SAS / SATA / NVMe* Data Cable Guide for up to 8 Front Drive Bays

Note: Drive numbering in the system illustrations is for general reference only. Actual drive numbering is dependent on SAS / SATA controller configuration and how they are cabled to the backplane.

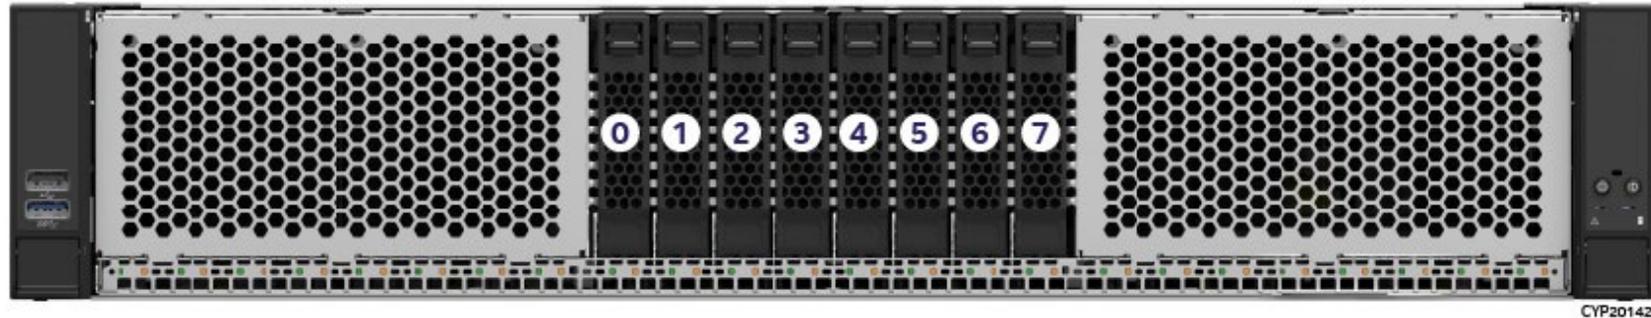


Figure 23. 2U 8 x 2.5" Front Drive Bay Configuration – M50FCP2UR208

Note: A splitter cable is a cable that has two or more connectors on one end.

Table 22. M50FCP2UR208 Cable Guide for up to 8 Front Drive Bays

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 to backplane SATA 0–3	Routed along left side of chassis	CYPCBLHDHDX1	840-mm cable, RA → VT
		Server board SATA 4–7 to backplane SATA 4–7			930-mm cable, RA → VT
SAS / SAS RAID	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card SATA 0 to backplane SATA 0–3	Routed along right side of chassis	CYPCBLSLHDKIT	860-mm cable, VT → VT
		Riser 1,2,3 add-in card SATA 1 to backplane SATA 4–7			660-mm cable, VT → VT
NVMe*	Server board	Server board MCIO to backplane.	Routed underneath the fan assembly	CBLMCSL2208KIT	For more details, see Table 19 .
NVMe	PCIe NVMe riser card	Riser 1 & 3 NVMe riser card to backplane		N/A	Configuration not supported

4.5.2 M50FCP2UR 16 x 2.5" SAS / SATA / NVMe* Data Cable Guide

Notes:

- For M50FCP2UR 16 x 2.5" configurations, make sure that the ventilation blank is installed in the middle of the chassis as shown in the following figure.
- Drive numbering in the system illustrations is for general reference only. Actual drive numbering is dependent on SAS / SATA controller configuration and how they are cabled to the backplane.

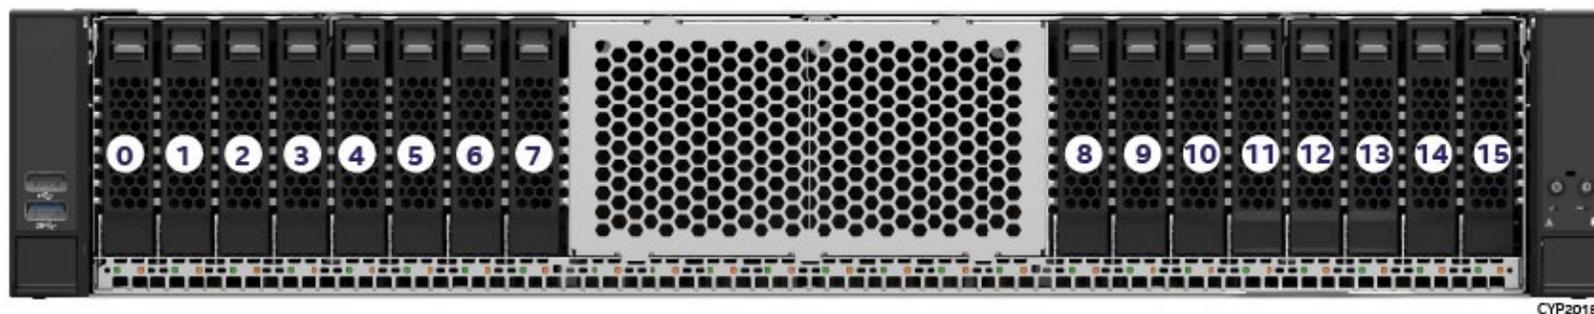


Figure 24. 2U 16 x 2.5" Front Drive Bay Configuration

The following accessory kits are needed to convert an M50FCP2UR208 system into an 8–15 front drive bay configuration.

- (1) 8 x 2.5" hot-swap backplane kit (iPC **CYPHSBP2208**)
- (8) 2.5" front drive bay module (iPC **CYP25HSCARRIER**)

Table 23. 2U 2.5" SAS/SATA Cable Guide for 16 Front Drive Bay Configuration

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 or SATA 4–7 to backplane SATA port 0–3, port 4–7, or port 8–11	Routed along left side of chassis	CYPCBLHDHDX1	840-mm cable, RA → VT
		Server board SATA 0–3 or SATA 4–7 to backplane SATA port 12–15	Routed along left side of chassis		930-mm cable, RA → VT
SAS / SATA RAID	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card port 0 to backplane SATA port 0–3	If using riser 1, route the cables through the left side of the chassis. If using riser 2 or riser 3, route the cables through the right side of the chassis.	CYPCBLSLHDKIT	660/860-mm cable, VT → VT
		Riser 1,2,3 add-in card port 1 to backplane SATA port 4–7			660/860-mm cable, VT → VT
		Riser 1,2,3 add-in card port 2 to backplane SATA port 8–11			660/860-mm cable, VT → VT
		Riser 1,2,3 add-in card port 3 to backplane SATA port 12–15			660/860-mm cable, VT → VT

Note: To support add-in card port 3 connectivity, it is necessary to order an additional iPC **CYPCBLSLHDKIT** cable kit.

Note: A splitter cable is a cable that has two or more connectors on one end.

Table 24. 2U 2.5" PCIe* NVMe* Cable Guide for 16 Front Drive Bays

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
NVMe*	Server board	Server board MCIO to backplane.	Routed along left of chassis	CBLMCSL2216KIT	For more details, see Table 19.
NVMe*	PCIe NVMe riser card	Riser 1 & 3 NVMe riser card to backplane		N/A	Configuration not supported

4.5.3 M50FCP2UR 24 x 2.5" SAS / SATA / NVMe* Data Cable Guide

Note: Drive numbering in the system illustrations is for general reference only. Actual drive numbering is dependent on SAS / SATA controller configuration and how they are cabled to the backplane.

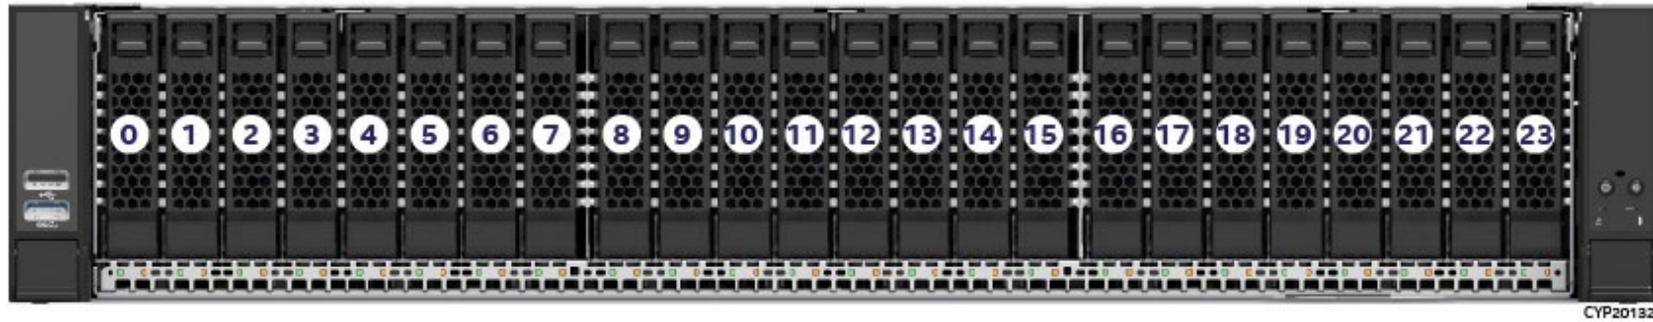


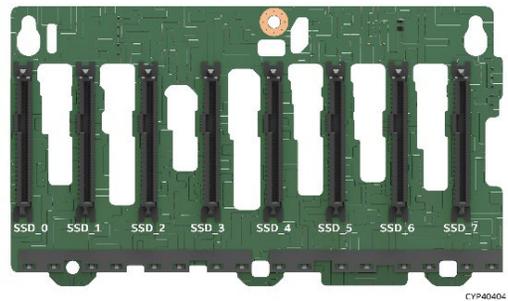
Figure 25. 2U 24 x 2.5" M50FCP2UR208 Front Drive Bay Configuration

The following accessory kits are needed to convert an M50FCP2UR208 system into a 17– 24 front drive bay configuration.

- (2) 8 x 2.5" hot-swap backplane kit (iPC **CYPHSBP2208**)
- (16) 2.5" front drive bay module (iPC **CYP25HSCARRIER**)



HSBP 1



HSBP 2



HSBP 3

Figure 26. 2U 2.5" x 24 System HSBP Enumeration

Table 25. 2U 2.5" SAS / SATA / NVMe* Cable Guide for 24 Front Drive Bays

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 or 4–7 to backplane, any SATA port except port 20–23	Route along left side of chassis	CYPCLHDHDX1	840-mm cable, RA → VT
		Server board SATA 0–3 or 4–7 to backplane SATA port 20–23			930-mm cable, RA → VT
SAS / SATA	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card port 0 to backplane SATA ports	If using riser 1, route the cables along the left side of the chassis.	CYPCLSLHDKIT	860-mm cable, VT → VT
		Riser 1,2,3 add-in card port 1 to backplane SATA ports	If using riser 2 or riser 3, route the cables along the right side of the chassis.		660-mm cable, VT → VT
NVMe*	Server board	Server board MCIO to backplane.	Routed underneath the fan assembly	CBLMCSL2224KIT	For more details, see Table 19 .
NVMe	PCIe NVMe riser card	Riser 1 NVMe riser card PCIe SSD 0–1 to backplane SSD 0–1	Routed along left of chassis	CBLMCSLRKIT	660-mm cable, VT → VT
		Riser 1 NVMe riser card PCIe SSD 2–3 to backplane SSD 2–3			
		Riser 3 NVMe riser card PCIe SSD 0–1 to backplane SSD 4–5	Routed along right of chassis		
		Riser 3 NVMe riser card PCIe SSD 2–3 to backplane SSD 6–7			

4.6 2U 12 x 3.5" – M50FCP2UR312 SAS / SATA / NVMe* Data Cable Guide



Figure 27. 2U 12 x 3.5" M50FCP2UR312 Front Drive Bay Configuration

Table 26. 2U 12 x 3.5" M50FCP2UR312 SAS / SATA / NVMe* Cable Guide

Storage Interface Type	Storage Interface Source	Cable Connection	Cable Routing	Intel Cable Kit (iPC)	Notes
SATA	Server board	Server board SATA 0–3 to backplane SATA port 0–3 or port 4–7	Routed along the left side of chassis	CYPCLHDHDX1	840-mm cable, RA → VT
SATA	Server board	Server board SATA 4–7 to backplane SATA port 4–7 or port 8–11			930-mm cable, RA → VT
SAS / SATA	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card port 0 to backplane SATA port 0–3	If using riser 1, route the cables along the left side of the chassis. If using riser 2 or riser 3, route the cables along the right side of the chassis.	CYPCLSLHDKIT	860-mm cable, VT → VT
SAS / SATA	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card port 1 to backplane SATA port 4–7			660-mm cable, VT → VT
SAS / SATA	PCIe SAS RAID add-in card	Riser 1,2,3 add-in card port 2 to backplane SATA port 8–11			860-mm cable, VT → VT
NVMe*	Server board	Server board CPU0 MCIO to backplane SSD 4. For more details, see Table 19 .	Route cables under the fan assembly	CBLMCSL2304KIT	175-mm cable, VT → VT
NVMe	Server board	Server board CPU0 MCIO to backplane SSD 5. For more details, see Table 19 .			200-mm cable, VT → VT
NVMe	Server board	Server board CPU0 MCIO to backplane SSD 6. For more details, see Table 19 .			205-mm cable, VT → VT
NVMe	Server board	Server board CPU0 MCIO to backplane SSD 7. For more details, see Table 19 .			180-mm cable, VT → VT
NVMe	PCIe NVMe riser card	N/A	N/A	N/A	Configuration not supported

5. 1U / 2U System Optional Accessories



The following sections identify available accessory kits and spare parts (FRUs) for all field-replaceable components supported by the Intel Server M50FCP Family.

The product tables found in this chapter are each divided into the following table columns:

- Product Description / Image.
- Order Information –Product identifiers used to order the product.
- Product Information –Product overview, kit content.

5.1 Riser Card Accessories and Spares for 1U Systems

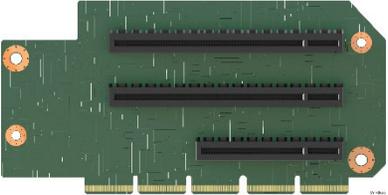
Table 27. Riser Card Accessories and Spares for 1U Systems

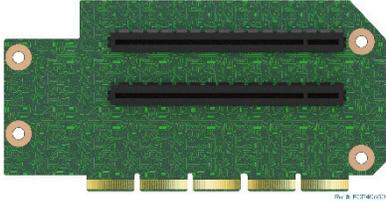
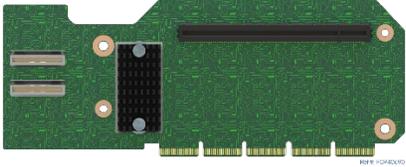
Description / Image	Order Information	Product Information
<p>1-Slot Riser Card For Riser Slot #1 1U System</p> 	<p>iPC FCP1URISER1 MM# 99AN29 UPC 00735858534277 EAN 5032037265850 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR <p>Product overview: Riser card option for Riser Slot #1 only. The one-slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • One low profile, half-length, single-width add-in card (x16 electrical, x16 mechanical) on slot 1 <p>Kit includes: (1) – Riser card</p>
<p>1-Slot Riser Card For Riser Slot #2 1U System</p> 	<p>iPC FCP1URISER2 MM# 99AN2A UPC 00735858534284 EAN 5032037265867 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR <p>Product overview: Riser card option for Riser Slot #2 only. The one-slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 – One low profile, half-length, single-width add-in card (x16 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>

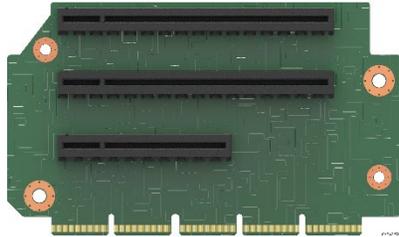
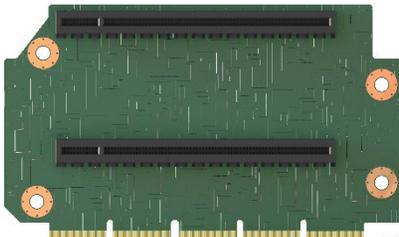
Description / Image	Order Information	Product Information
<p>PCIe* Interposer Kit For Interposer Riser Slot and Riser Slot #2 1U System</p> <p>Interposer Riser Card</p>  <p><small>Ref #: FCP1C670</small></p> <p>PCIe* Riser Card for Riser Slot #2</p>  <p><small>Ref #: FCP1C680</small></p> <p>PCIe* 5.0 Interposer Cable</p>  <p><small>Ref #: CPM122</small></p>	<p>iPC FCP1URISER2KIT MM# 99AN28 UPC 00735858534291 EAN 5032037265874 MOQ 1</p>	<p><u>Product type:</u> Accessory / Spare</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR <p><u>Product overview:</u></p> <p>The two-slot PCIe 5.0 interposer riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (right side) – One low profile / half-length, single-width add-in card. (x8 electrical, x8 mechanical) • PCIe_SSD_0-1 (left side) – (x8 electrical, x8 mechanical) <p>The two-slot PCIe 5.0 riser card option for Riser Slot #2 supports:</p> <ul style="list-style-type: none"> • Slot 1 (left side) – One low profile / half-length, single-width add-in card. (x16 electrical, x16 mechanical) • PCIe_SSD_0-1 (right side) (x8 electrical, x8 mechanical) <p><u>Kit includes:</u></p> <p>(1) – PCIe interposer riser card (1) – PCIe riser card for Riser Slot #2 (1) – PCIe interposer cable</p>

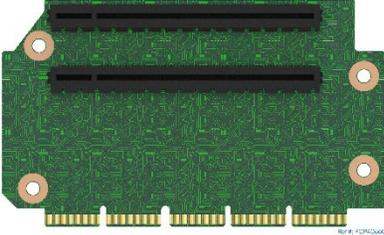
5.2 Riser Card Accessories and Spares for 2U Systems

Table 28. Riser Card Accessories and Spares for 2U Systems

Description / Image	Details	Description
<p>2U 3-Slot Riser Card For Riser Slot #1 2U System</p> 	<p>iPC FCP2URISER1STD MM# 99AN80 UPC 00735858534307 EAN 5032037265881 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #1 only. The three-slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/full length single-width add-in card slot (x16 electrical, x16 mechanical) • Slot 2 (middle) – One full height/full length single-width add-in card slot (x8 electrical, x16 mechanical) • Slot 3 (bottom) – One full height/half-length single-width add-in card slot (x8 electrical, x8 mechanical) <p>Kit includes: (1) – Riser card</p>
<p>2U 2-Slot PCIe* 5.0 Riser Card For Riser Slot #1 2U System</p> 	<p>iPC FCP2URISER1DW MM# 99AN2D UPC 00735858534314 EAN 5032037265898 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #1 only. The two-slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/full length double-width slot (x16 electrical, x16 mechanical) • Slot 2 (bottom) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>

Description / Image	Details	Description
<p>2U 2-Slot PCIe* 5.0 Riser Card For Riser Slot #1 2U System</p> 	<p>iPC FCP2URISER1SW MM# 99AN2F UPC 00735858534321 EAN 5032037265904 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #1 only.</p> <p>The two-slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) • Slot 2 (bottom) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>
<p>2U PCIe NVMe* Riser Card For Riser Slot #1 2U System</p> 	<p>iPC FCP2URISER1RTM MM# 99AN2C UPC 00735858534338 EAN 5032037265911 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #1 only.</p> <p>The PCIe 5.0 NVMe riser card option supports:</p> <ul style="list-style-type: none"> • Slot 3 (top) – One half-length or full length single-width slot (x16 electrical, x16 mechanical) • Two x8 PCIe NVMe M.2 connectors: • PCIe_SSD_0-1 (top) (x8 electrical, x8 mechanical) • PCIe_SSD_2-3 (bottom) (x8 electrical, x8 mechanical) <p>Kit includes: (1) – Riser card</p>

Description / Image	Details	Description
<p>2U 3-Slot PCIe* Riser Card For Riser Slot #2 2U System</p> 	<p>iPC FCP2URISER2STD MM# 99AN81 UPC 00735858534345 EAN 5032037265928 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #2 only. The three slot PCIe riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/full length single-width slot (x16 electrical, x16 mechanical) • Slot 2 (middle) – One full height/full length single-width slot (x8 electrical, x16 mechanical) • Slot 3 (bottom) – One full height/half-length single-width slot (x8 electrical, x8 mechanical) <p>Kit includes: (1) – Riser card</p>
<p>2U 2-Slot PCIe Riser Card For Riser Slot #2 2U System</p> 	<p>iPC FCP2URISER2DW MM# 99AN30 UPC 00735858534352 EAN 5032037265935 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #2 only. The two slot PCIe riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/full length double-width slot (x16 electrical, x16 mechanical) • Slot 2 (bottom) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>

Description / Image	Details	Description
<p>2U 2-Slot PCIe* Riser Card For Riser Slot #2 2U System</p> 	<p>iPC FCP2URISER2SW MM# 99AN31 UPC 00735858534369 EAN 5032037265942 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #2 only. The two slot PCIe 5.0 riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) • Slot 2 (bottom) – One full height/half-length single-width slot (x16 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>
<p>2U 2-Slot PCIe Riser Card For Riser Slot #3 2U System</p> 	<p>iPC FCP2URISER3STD MM# 99AN82 UPC 00735858534376 EAN 5032037265959 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP2UR <p>Product overview: Riser card option for Riser Slot #3 only. The two slot PCIe riser card option supports:</p> <ul style="list-style-type: none"> • Slot 1 (top) – Low profile/ half-length single-width slots (x8 electrical, x16 mechanical) • Slot 2 (bottom) – Low profile/ half-length single-width slots (x8 electrical, x16 mechanical) <p>Kit includes: (1) – Riser card</p>

Description / Image	Details	Description
<p>2-Slot PCIe* NVMe* Riser Card For Riser Slot #3 1U / 2U Systems</p> 	<p>iPC CYPRISER3RTM MM# 99A3PA UPC 00735858471763 EAN 5032037210201 MOQ 1</p>	<p><u>Product type: Accessory / Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> Riser card option for Riser Slot #3 only. The Two-Slot PCIe NVMe riser card supports two x8 PCIe SlimSAS connectors labeled PCIe_SSD_0-1 and PCIe_SSD_2-3. Each connector supports up to two NVMe SSDs in the front drive bay through a backplane. The two slot PCIe NVMe riser card option supports:</p> <ul style="list-style-type: none"> • PCIe_SSD_0-1 Slot (top) (x8 electrical, x8 mechanical) • PCIe_SSD_2-3 Slot (bottom) (x8 electrical, x8 mechanical) <p><u>Kit includes:</u> (1) – Riser card</p>

5.3 Intel® Ethernet Network Adapters for OCP*

The server system supports several types of Intel Ethernet Network Adapters (see [Table 29](#)). These adapters are compatible with the Open Compute Project* (OCP*) 3.0 specifications. The OCP-compatible modules are mounted to a high-density 168-pin connector on the server board, labeled `OCP_IO_Module`. The following figure shows the Intel Ethernet Network Adapter placement on the server board.

Note: Refer to <https://servertools.intel.com/sct> for the latest list of adapters supported by the server board.

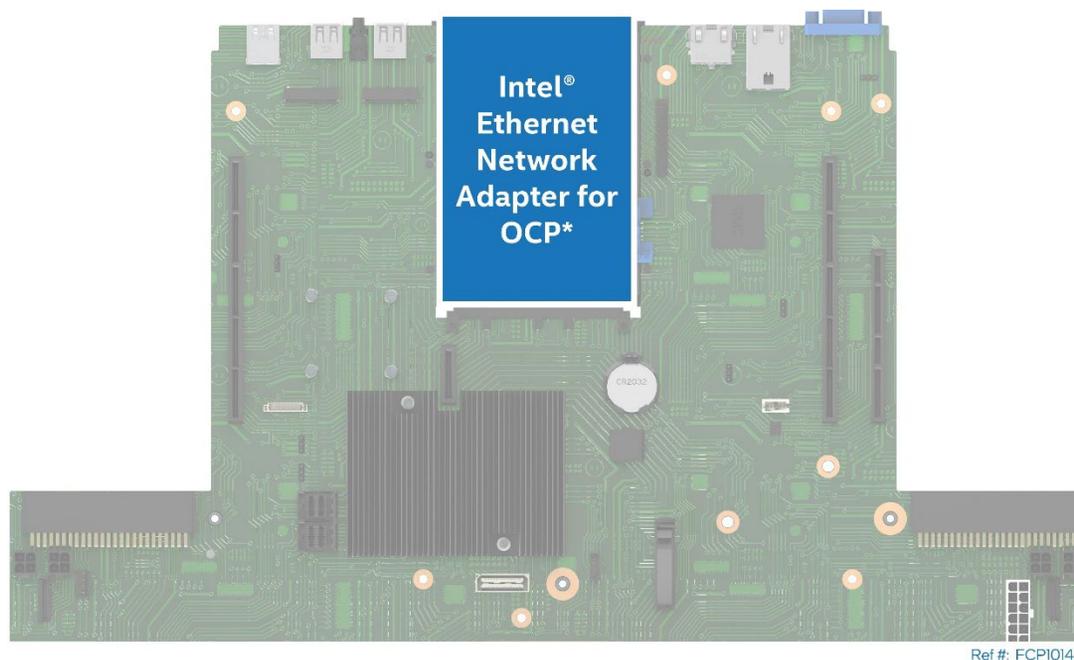


Figure 28. Intel® Ethernet Network Adapter Placement

All OCP module types support one of these three engagement mechanisms: pull tab, ejector latch, or internal lock. The engagement mechanism refers to the mechanism required to install / remove the OCP module.

Supported OCP modules are installed into an OCP bay in the back of the server chassis. The modules are installed from the outside of the chassis. [Figure 31](#) shows the installation of the pull tab engagement mechanism.

First remove the bay filler panel (see [Figure 30](#)). Then, carefully slide the module into the bay until it is fully seated in the OCP slot on the server board and is locked in place (see [Figure 31](#)). For more information on OCP module installation and removal of each OCP module type, see the

Intel® Server System M50FCP2UR System Integration and Service Guide or the Intel® Server System M50FCP1UR System Integration and Service Guide.

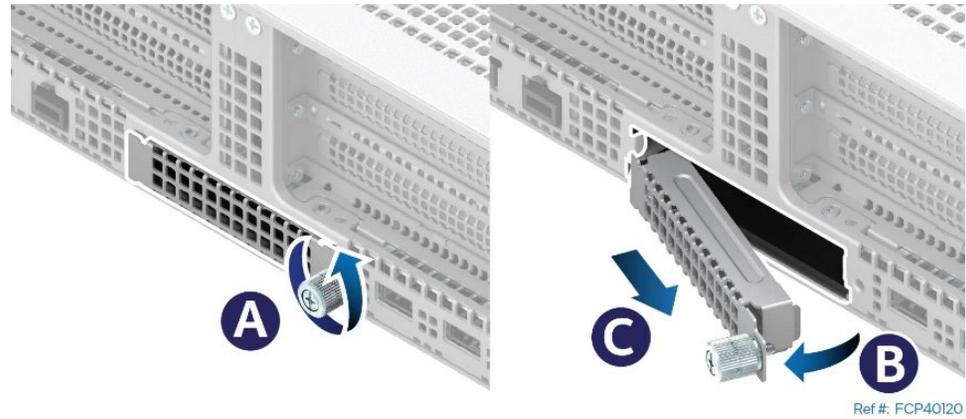



Figure 29. OCP* Module Bay Filler Removal (2U System Shown)



Figure 30. OCP* Module with Pull Tab Installation (2U System Shown)

Table 29. Intel® Ethernet Network Adapters for OCP*

Description / Image	Order Information	Product Information
<p>Intel® Ethernet Network Adapter E810-CQDA1 for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC E810CQDA1OCPV3 MM# 983092 UPC 00735858461115 EAN 5032037200639 MOQ 1</p>	<p><u>Product type: 1U / 2U accessory kit</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Single port, QSFP28, 100/50/25/10/1 GbE OCP 3.0 Network Adapter • Connects to server board using the OCP Module Connector • Supports x16 PCIe 4.0 lanes • Supports Pull Tab module installation/removal mechanism • Concurrent RDMA (iWARP and RoCEv2) support • Data Plane Development Kit (DPDK) optimized • Application Device Queues (ADQ) support • Extensive Network Virtualization Overlay protocol support • Enhanced QoS and Access Control List (ACL) support <p><u>Kit includes:</u> (1)– Intel Ethernet Network Adapter</p>
<p>Intel® Ethernet Network Adapter E810-CQDA2 for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC E810CQDA2OCPV3 MM# 983581 UPC 00735858456883 EAN 5032037196512 MOQ 1</p>	<p><u>Product type: 1U / 2U accessory kit</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Dual port, QSFP28, 100/50/25/10/1 GbE OCP 3.0 Module • Connects to server board using the OCP Module Connector • Supports x16 PCIe 4.0 lanes • Supports pull tab module installation/removal mechanism • Concurrent RDMA (iWARP and RoCEv2) support • Data Plane Development Kit (DPDK) Optimized • Application Device Queues (ADQ) support • Extensive Network Virtualization Overlay protocol support • Enhanced QoS and Access Control List (ACL) support <p><u>Kit includes:</u> (1) – Intel Ethernet Network Adapter</p>

Description / Image	Order Information	Product Information
<p>Intel Ethernet Network Adapter E810-XXVDA2 for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC E810XXVDA2OCPV3 MM# 983262 UPC 00735858452977 EAN 5032037193238 MOQ 1</p>	<p><u>Product type:</u> 1U / 2U accessory kit</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Dual port, SFP28, 25/10 GbE OCP 3.0 Module • Connects to server board using the OCP Module Connector • Supports x16 PCIe 4.0 lanes • Concurrent RDMA (iWARP and RoCEv2) support • Data Plane Development Kit (DPDK) Optimized • Application Device Queues (ADQ) support • Extensive Network Virtualization Overlay protocol support • Enhanced QoS and Access Control List (ACL) support <p><u>Kit includes:</u></p> <p>(1) – Intel Ethernet Network Adapter</p>
<p>Intel® Ethernet Network Adapter X710-T2L for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC X710T2LOCPV3 MM# 9999MJ UPC 00735858447027 EAN 5032037188111 MOQ 1</p>	<p><u>Product type:</u> 1U / 2U accessory kit</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Dual port, RJ45, 10/1 GbE OCP 3.0 Module • Connects to server board using the OCP Module Connector • Supports x8 PCIe 3.0 lanes • Supports pull tab module installation/removal mechanism • Network virtualization support (VxLAN, GENEVE, NVGRE, MPLS, and VXLAN-GPE with NSH) • Intel® Ethernet Flow Director (Intel® Ethernet FD) support for hardware-based application traffic steering • Data Plane Development Kit (DPDK) Optimized <p><u>Kit includes:</u></p> <p>(1) – Intel Ethernet Network Adapter</p>

Description / Image	Order Information	Product Information
<p>Intel® Ethernet Network Adapter X710-T4L for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC X710T4LOCPV3 MM# 9999ML UPC 00735858450010 EAN 5032037190619 MOQ 1</p>	<p>Product type: 1U / 2U accessory kit</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p>Product overview:</p> <ul style="list-style-type: none"> • Quad port, RJ45, 10/1 GbE OCP 3.0 Module • Connects to server board using the OCP Module Connector • Supports x8 PCIe 3.0 lanes • Supports pull tab module installation/removal mechanism • Network Virtualization (VxLAN, GENEVE, NVGRE, MPLS, and VXLAN-GPE with NSH) support • Intel® Ethernet FD support for hardware based application traffic steering • Data Plane Development Kit (DPDK) Optimized <p>Kit includes: (1) – Intel Ethernet Network Adapter</p>
<p>Intel® Ethernet Network Adapter X710-DA2 for OCP* 3.0 1U / 2U Systems</p> 	<p>iPC X710DA2OCPV3 MM# 979095 UPC 00735858421232 EAN 5032037163743 MOQ 1</p>	<p>Product type: 1U / 2U accessory kit</p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p>Product overview:</p> <ul style="list-style-type: none"> • Dual port, SFP+ DA, 2X 10 GbE OCP 3.0 Module • Connects to server board using the OCP Module Connector • Supports x8 PCIe 3.0 lanes • Supports pull tab module installation/removal mechanism • Network virtualization (VxLAN, GENEVE, NVGRE, MPLS, and VXLAN-GPE with NSH) support • Intel® Ethernet FD support for hardware based application traffic steering • Data Plane Development Kit (DPDK) Optimized <p>Kit includes: (1) – Intel Ethernet Network Adapter</p>

5.4 Intel® RAID Add-In Cards, Modules, and Accessories

5.4.1 Intel® RAID Controller Add-In Cards

Table 30. Intel® RAID Controller Add-In Cards – SAS 3.0 (12 Gb/s) and NVMe* PCIe* 4.0

Description/Image	Order Information	Product Information
<p>Intel® Storage Controller RS3P4QF160J 1U / 2U Systems</p> 	<p>iPC RS3P4QF160J MM# 999RKM UPC 00735858452830 EAN 5032037193115 MOQ 5</p>	<p>Product type: <u>1U / 2U accessory kit</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p>Product overview:</p> <ul style="list-style-type: none"> • Low-profile, half-length, (MD2 compliant) PCIe 4.0 add-in card • Entry level tri-mode SAS/SATA/NVMe adapter. • 16 internal SAS / SATA ports / 4 NVMe (PCIe 4.0) • Broadcom* SAS3816 IO Controller • JBOD (SAS/SATA/NVMe Connectivity) <p>Note: SAS and NVMe data cables not included and must be purchased separately.</p> <p>Kit includes:</p> <p>(1) – Intel® Storage Controller (1) – Low-profile mounting bracket</p>
<p>Intel® Storage Controller RS3P4GF016J 1U / 2U Systems</p> 	<p>iPC RS3P4GF016J MM# 999TJ3 UPC 00735858452823 EAN 5032037193108 MOQ 5</p>	<p>Product type: <u>1U / 2U accessory kit</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p>Product overview:</p> <ul style="list-style-type: none"> • Low-profile, half-length, (MD2 compliant) PCIe 4.0 add-in card • Entry level tri-mode SAS/SATA/NVMe adapter. • 16 external SAS / SATA ports • Broadcom* SAS3816 IO Controller • JBOD (SAS/SATA Connectivity) <p>Note: SAS data cables not included and must be purchased separately.</p> <p>Kit includes:</p> <p>(1)– Intel Storage Controller (1) – low-profile mounting bracket</p>

Description/Image	Order Information	Product Information
<p>Intel® RAID Controller RS3P4TF160F 1U / 2U Systems</p> 	<p>iPC RS3P4TF160F MM# 999TJ4 UPC 00735858452816 EAN 5032037193092 MOQ 5</p>	<p><u>Product type: 1U / 2U accessory kit</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Low-profile, half-length, (MD2 compliant) PCIe 4.0 add-in card • Full featured tri-mode RAID controller • 16 internal SAS / SATA ports / 4 NVMe (PCIe 4.0) • Broadcom* SAS3916 ROC • RAID levels – 0/1/10/5/6/50/60 and JBOD • Supports maintenance free backup unit – iPC AXXRMFBU7 <p>Note: SAS and NVMe data cables not included and must be purchased separately.</p> <p><u>Kit includes:</u></p> <p>(1) – Intel® RAID Controller (1) – Low-profile mounting bracket</p>
<p>Intel® RAID Controller RS3P4MF088F 1U / 2U Systems</p> 	<p>iPC RS3P4MF088F MM# 99ADDX UPC 00735858486590 EAN 5032037223287 MOQ 5</p>	<p><u>Product type: 1U / 2U accessory kit</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <ul style="list-style-type: none"> • Low Profile, half-length, (MD2 Compliant) PCIe 4.0 add-in card • Full featured tri-mode RAID controller • 8 internal SAS / SATA ports / 4 NVMe (PCIe 4.0) • 8 external SAS • Broadcom* SAS3916 ROC • RAID levels – 0/1/10/5/6/50/60 and JBOD • Supports maintenance free backup unit – iPC AXXRMFBU7 <p>Note: SAS and NVMe data cables not included and must be purchased separately.</p> <p><u>Kit includes:</u></p> <p>(1) – Intel RAID Controller (1) – Low-profile mounting bracket</p>

5.4.2 Miscellaneous Intel® RAID Accessory Options

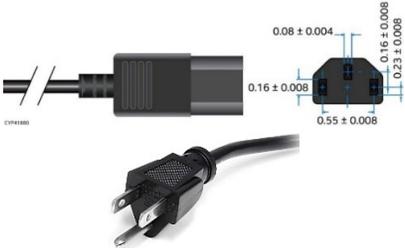
Table 31. Intel® RAID Accessory Options

Image	Details	Description
<p data-bbox="115 305 588 329">Intel® RAID Maintenance Free Backup Unit</p> <p data-bbox="262 342 441 367">1U / 2U Systems</p> 	<p data-bbox="638 342 957 488"> iPC AXRMFBU7 MM# 957677 UPC 00735858336192 EAN 5032037099790 MOQ 5 </p>	<p data-bbox="1045 313 1350 337"><u>Product type:</u> Accessory kit</p> <p data-bbox="1045 358 1247 383"><u>Product overview:</u></p> <p data-bbox="1045 396 1986 483">A super-capacitor module designed to protect data in dynamic memory during a power failure or system crash event. The AXRMFBU7 is used with the full-featured tri-mode RAID modules and controllers.</p> <p data-bbox="1045 505 1239 529"><u>Compatible with:</u></p> <ul data-bbox="1104 537 1503 591" style="list-style-type: none"> Intel® RAID Controller RS3P4TF160F Intel® RAID Controller RS3P4MF088F

5.5 Power Supply Unit Options and Power Cable Kits

Table 32. Power Supply Modules and Power Cords

Description/Image	Order Information	Product Information
<p>Power Supply 2100 W AC Common Redundant 2U System</p> 	<p>iPC FCXX2100CRPS MM# 999D4L UPC 00735858424592 EAN 5032037166829 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview: 2100 W AC common redundant power supply with 80 PLUS* Platinum efficiency.</p> <p>Note: Power cord is sold separately.</p> <p>Kit includes: (1) – Power supply module</p>
<p>Power Supply 1600 W AC Common Redundant 1U / 2U Systems</p> 	<p>iPC AXX1600TCRPS MM# 99ADF2 UPC 00735858407038 EAN 5032037151245 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP1UR Intel® Server System M50FCP2UR <p>Product overview: 1600 W AC common redundant power supply with 80 PLUS Titanium efficiency.</p> <p>Note: Power cord is sold separately.</p> <p>Kit includes: (1) – Power supply module</p>
<p>Power Supply 1300 W AC Common Redundant 1U / 2U Systems</p> 	<p>iPC AXX1300TCRPS MM# 956542 UPC 00735858345705 EAN 5032037106191 MOQ 1</p>	<p>Product type: Accessory / Spare</p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP1UR Intel® Server System M50FCP2UR <p>Product overview: 1300 W AC common redundant power supply with 80 PLUS Titanium efficiency.</p> <p>Note: Power cord is sold separately.</p> <p>Kit includes: (1) – Power supply module</p>

Description/Image	Order Information	Product Information
<p>Power Cable 1500-mm (59 in) North America 1U / 2U Systems</p> 	<p>iPC FPWRCABLENA MM# 879287 UPC 00735858181129 EAN 503203702015738 MOQ 1</p>	<p><u>Product type: Accessory / Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> North America power cord.</p> <p><u>Kit includes:</u> (1) – Power Cable</p>


5.6 1U / 2U Rack Mount Kits

Advisory Note: Available rack and cabinet mounting kits are not designed to support shipment of the server system while installed in a rack. If you choose to do so, Intel advises verification of your shipping configuration with appropriate shock and vibration testing before shipment. Intel does not perform shipping tests that cover the complex combination of unique rack offerings and custom packaging options.

Caution: Exceeding the specified maximum weight limit of a given rail kit or misaligning the server in the rack may result in failure of the rack rails, which could damage the system or cause personal injury. Involving two people or the use of a mechanical assist tool to install and align the server into the rack is highly recommended.

Table 33. Rack Mount Kits

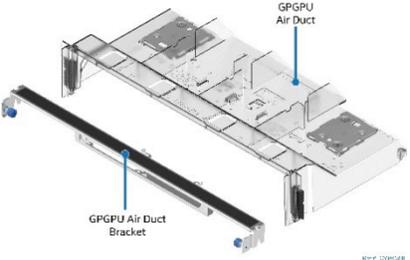
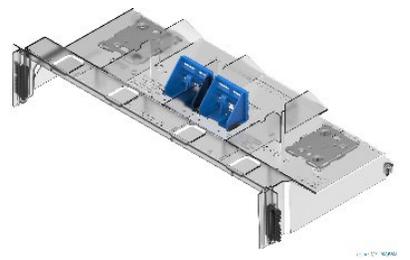
Description/Image	Order Information	Product Information
<p>Full Extension Rail Kit 1U / 2U Systems</p> 	<p>iPC CYPFULLEXTRAIL MM# 999ZCN UPC 00735858447096 EAN 5032037188180 MOQ 1</p>	<p>Product type: <u>Accessory</u></p> <p>Where used:</p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p>Product overview:</p> <p>CYPFULLEXTRAIL – Premium rail kit with cable management arm (CMA) support</p> <ul style="list-style-type: none"> • 1U, 2U compatible • Toolless installation • Rack installation front and rear post distance adjustment from 623 mm ~ 942 mm • 820 mm travel distance • Full extension from rack • 31 kg (68.34 lbs.) maximum supported weight • Support for CMA AXXCMA2



Description/Image	Order Information	Product Information
<p>Half Extension Rail Kit 1U / 2U Systems</p> 	<p>iPC CYPHALFEXTRAIL MM# 99A3RR UPC 00735858456333 EAN 5032037196017 MOQ 1</p>	<p><u>Product type: Accessory</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> CYPHALFEXTRAIL – Value rack mount rail kit</p> <ul style="list-style-type: none"> • 1U, 2U compatible • Toolless chassis attachment • Tools required to attach rails to rack • Rack installation front and rear post distance adjustment from 660 mm to 838 mm • 560 mm travel distance • Half extension from rack • Support for front cover removal and fan replacement • 31 kg (68.34 lbs.) maximum support weight <p>Note: No CMA support.</p>
<p>Cable Management Arm 1U / 2U Systems</p> 	<p>iPC AXXCMA2 MM# 939211 UPC 00735858292009 EAN 5032037070560 MOQ 1</p>	<p><u>Product type: Accessory</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> Supports CYPFULLEXTRAIL only</p>

6. Miscellaneous Accessory Options

Table 34. Miscellaneous Accessory Options

Description/Image	Order Information	Product Information
<p>2U Tall Processor Heat Sink Board / 2U System</p> 	<p>iPC EGSM2UHSSTD MM# 99AN83 UPC 735858518925 EAN 5032037251723 MOQ 1</p>	<p>Product type: <u>Accessory/Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server Board M50FCP2SBSTD Intel® Server System M50FCP2UR <p>Product overview: Spare 2U-height heat sink.</p> <p>Note: Systems installed with 2U standard heat sink(s) only support half-length add-in cards.</p> <p>Kit includes: (1) – 2U-height heat sink</p>
<p>1U Tall Processor Heat Sink Board / 1U / 2U Systems</p> 	<p>iPC EGSM1UHSSTD MM# 99ANGK UPC 00735858527828 EAN 5032037259811 MOQ 1</p>	<p>Product type: <u>Accessory/Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server Board M50FCP2SBSTD Intel® Server System M50FCP1UR Intel® Server System M50FCP2UR <p>Product overview: Spare 1U-height heat sink.</p> <p>Kit includes: (1) – 1U-height heat sink</p>
<p>EVAC Processor Heat Sink Board / 1U System</p> 	<p>iPC FCP1UHSEVAC MM# 99AN3F UPC 735858523233 EAN 5032037255394 MOQ 1</p>	<p>Product type: <u>Accessory/Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server Board M50FCP2SBSTD Intel® Server System M50FCP1UR <p>Product overview: Spare EVAC heat sink.</p> <p>Note: Standard in Intel® Server System M50FCP1UR204 only. Not supported in any other Intel server system SKUs.</p> <p>Kit includes: (1) – EVAC heat sink</p>

Description/Image	Order Information	Product Information
<p>2U System GPGPU Air Duct For 2U systems when using GPGPU accelerator Add-in Card</p> 	<p>iPC FCPGPGPUKIT MM# 99AN58 UPC 735858522809 EAN 5032037255011 MOQ 1</p>	<p>Product type: <u>Accessory/Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview: Required 2U accessory kit when installing GPGPU accelerator add-in cards.</p> <p>Notes:</p> <ul style="list-style-type: none"> Not compatible with 2U CPU heat sinks. This air duct requires the system be configured with low-profile 1U CPU heat sinks – iPC EGSM1UHSSTD The Intel® Server System M50FCP1UR and M50FCP2UR families do not support GPGPU accelerator cards with active heat sinks. Systems configured with any type of GPGPU card must have the shipping bracket installed before the system is exposed to any level of shock or vibration or is shipped to the end user location. Failure to install the shipping bracket can cause serious damage to various components within the system. <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – GPGPU air duct (1) – GPGPU air duct bracket (2) – 200/250-mm GPGPU power cable (2) – 235-mm ATS300W power cable (2) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket
<p>2U System Air Duct for 1U CPU Heat Sinks 2U System</p> 	<p>iPC FCPDUCTCMN MM# 99AN57 UPC 00735858522823 EAN 5032037255035 MOQ 1</p>	<p>Product type: <u>Accessory/Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview: Air duct for low profile 1U-height CPU heat sinks.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – Air duct with holders for full length add-in cards. (2) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket installed on top of air duct.

Description/Image	Order Information	Product Information
<p>Power cable for internal SATA, Mini-SAS HD 2U System</p> 	<p>iPC FCPCBLINTSTKIT MM# 99AN56 UPC 735858522793 EAN 5032037255004 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview: Power cable for internal SATA SSDs, Mini-SAS HD to 7-pin SATA, internal SATA SSD bracket. Used in 2U systems as spare and/or accessory (M50FCP2UR208 based x8, x16, x24 front drive bay systems, M50FCP2UR312).</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – 120/180-mm splitter cable, 2U power cable for internal SATA. Power cable connects server board 3.3/5/12 V power connector to internal SATA SSD power connectors (1) – 175-mm cable, server board Mini-SAS HD connectors to internal 7-pin SATA SSD (2 ports) (1) – Sheet metal bracket for internal SATA SSDs
<p>Front Bezel 1U Systems</p> 	<p>iPC MYP1UBEZEL MM# 99A2D7 UPC 00735858455244 EAN 5032037195164 MOQ 1</p>	<p>Product type: <u>Accessory</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP1UR <p>Product overview: Non-locking plastic front panel bezel that latches between the two chassis rack handles of a 1U chassis.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – 1U bezel
<p>Front Bezel 2U Systems</p> 	<p>iPC CYP2UBEZEL MM# 99A5T7 UPC 00735858471657 EAN 5032037210096 MOQ 1</p>	<p>Product type: <u>Accessory</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview: Non-locking plastic front panel bezel that latches between the two chassis rack handles of a 2U chassis.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – 2U bezel

Description/Image	Order Information	Product Information
<p>Intel® TPM 2.0 Board / 1U / 2U Systems</p> 	<p>iPC AXXTPMENC9 MM# 99C69H UPC 00735858527378 EAN 5032037259385 MOQ 1</p>	<p><u>Product type: Accessory/Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p>A TPM is a hardware-based security device that addresses the growing concern on boot process integrity and offers better data protection.</p> <p>TPM protects the system start-up process by ensuring that it is tamper-free before releasing system control to the operating system.</p> <p>A TPM device provides secured storage to store data, such as security keys and passwords. In addition, a TPM device has encryption and hash functions.</p> <p>AXXTPMENC8 implements TPM as per TPM PC Client specifications revision 2.0 by the Trusted Computing Group (TCG).</p>
<p>Intel® TPM 2.0 Board / 1U / 2U Systems</p> 	<p>iPC AXXTPMCHNE8 MM# 960608 UPC 00735858347341 EAN 5032037107068 MOQ 1</p>	<p><u>Product type: Accessory/Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p>Note: AXXTPMCHNE8 compatible for use in China.</p> <p>A TPM is a hardware-based security device that addresses the growing concern on boot process integrity and offers better data protection.</p> <p>TPM protects the system start-up process by ensuring that it is tamper-free before releasing system control to the operating system.</p> <p>A TPM device provides secured storage to store data, such as security keys and passwords. In addition, a TPM device has encryption and hash functions.</p> <p>AXXTPMCHNE8 implements TPM as per TPM PC Client specifications revision 2.0 by the Trusted Computing Group (TCG).</p>

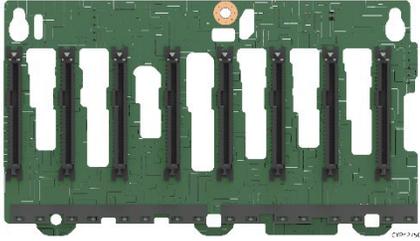

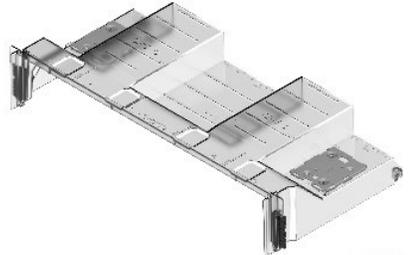
Description/Image	Order Information	Product Information
<p>Advanced System Management Key Board / 1U / 2U Systems No Image</p>	<p>iPC ADVSYSMGMTKEY MM# 99AJX5 UPC N/A EAN N/A MOQ 1</p>	<p><u>Product type: Accessory</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p>The Advanced System Management product key (iPC ADVSYSMGMTKEY) unlocks the following advanced system management features:</p> <ul style="list-style-type: none"> • Virtual Media Local Image Redirection (HTML5 and Java) • Virtual Media shared files and folders redirection • Out-of-band hardware RAID Management for latest Intel® RAID cards • Included single system license for Intel® Data Center Manager (Intel® DCM) <p>Note: Needed to enable advance system management features within the Integrated BMC Web Console. For more information, see the <i>Intel® Server Board M50FCP2SBSTD TPS</i>.</p> <p><u>Kit includes:</u></p> <p>Software license key to be uploaded to the onboard BMC</p>

7. 1U / 2U Spare and Replacement Parts (FRUs)

System integrators and distributors may choose to hold additional stock of individual system components. Intel makes available the following spare and replacement parts (FRUs) compatible with the specified Intel server family.

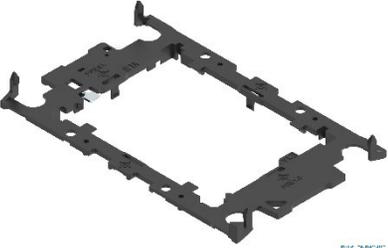
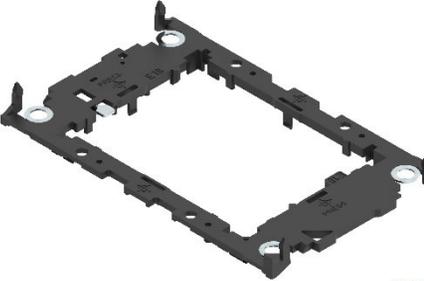
Table 35. Spare and Replacement Parts

Description / Image	Order Information	Product Information
<p>4 x 2.5" Drive Backplane 1U System</p> 	<p>iPC CYPHSBP1204 MM# 99A3NM UPC 00735858471800 EAN 5032037210249 MOQ 1</p>	<p>Product type: <u>Spare</u> Hot-swap backplane board spare supporting SAS/SATA and NVMe drives in the M50FCP1UR204 system.</p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP1UR204 <p>Product overview: 1U backplane with support for up to four 3.5" or 2.5" drives. Each drive connector is hot-swap capable and supports SATA, SAS, or NVMe drive interfaces. See the <i>Intel® Server System M50FCP1UR TPS</i> for additional information.</p> <p>Kit includes: (1) – Backplane board</p>
<p>12 x 2.5" SAS/SATA/NVMe* Backplane 1U System</p> 	<p>iPC CYPHSBP1212 MM# 99A3NN UPC 00735858471817 EAN 5032037210256 MOQ 1</p>	<p>Product type: <u>Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP1UR212 <p>Product overview: 1U backplane with support for up to twelve 3.5" or 2.5" drives. Each drive connector is hot-swap capable and supports SATA, SAS, or NVMe drive interfaces. See the <i>Intel® Server System M50FCP1UR TPS</i> for additional information.</p> <p>Kit includes: (1) – Backplane board</p>

Description / Image	Order Information	Product Information
<p>8 x 2.5" Drive Backplane 2U System</p> 	<p>iPC CYPHSBP2208 MM# 99A3NF UPC 00735858471787 EAN 5032037210225 MOQ 1</p>	<p>Product type: <u>Accessory / Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview:</p> <p>Hot swap backplane board spare supporting SAS/SATA and NVMe drives in the systems based on M50FCP2UR208.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – Backplane board (1) – 75-mm cable, HSBP I²C connector to HSBP I²C connector (5 pin to 5 pin) (1) – 250-mm cable, server board I²C connector (left) to HSBP I²C connector (left) (5 pin to 5 pin) (1) – 350-mm cable, server board I²C connector (left) to HSBP (middle) I²C connector (5 pin to 5 pin)
<p>12 x 3.5" Drive Backplane 2U System</p> 	<p>iPC CYPHSBP2312 MM# 99A3NL UPC 00735858471794 EAN 5032037210232 MOQ 1</p>	<p>Product type: <u>Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview:</p> <p>Combination hot-swap backplane board spare supporting SAS and NVMe drives in the M50FCP2UR312 systems.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – Backplane board.
<p>2U Tall Air Duct 2U System</p> 	<p>iPC FCPDUCTSTD MM# 99AN39 UPC 735858522816 EAN 5032037255028 MOQ 1</p>	<p>Product type: <u>Spare</u></p> <p>Where used:</p> <ul style="list-style-type: none"> Intel® Server System M50FCP2UR <p>Product overview:</p> <p>Air duct for 2U-height CPU heat sinks.</p> <p>Note: The use of low-profile 1U CPU heat sinks with this air duct is not supported.</p> <p>Kit includes:</p> <ul style="list-style-type: none"> (1) – Air duct with holders for add-in cards. (2) – Intel® RAID Maintenance Free Backup Unit (RMFBU) bracket installed on top of the air duct.

Description / Image	Order Information	Product Information
<p>System Fan 1U System (4 Pack)</p> 	<p>iPC CYPFAN1UKIT MM# 99A3NZ UPC 00735858471848 EAN 5032037210287 MOQ 4</p>	<p><u>Product type:</u> Spare</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR <p><u>Product overview:</u> Spare system fans.</p> <p><u>Each kit includes:</u> (1) – 40 x 40 x 56 mm dual motor system fans with 8-pin connectors.</p>
<p>System Fan 2U System (3 Pack)</p> 	<p>iPC CYPFAN2UKIT MM# 99A3P0 UPC 00735858471855 EAN 5032037210294 MOQ 3</p>	<p><u>Product type:</u> Spare</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p><u>Each kit includes:</u> (1) – 60 x 60 x 38 mm dual motor system fans with 6-pin connectors.</p>

Description / Image	Order Information	Product Information
<p>2.5" SSD Drive Mounting Rail Plus Drive Extraction Lever Kit (8-Pack) 1U / 2U Systems</p> 	<p>iPC CYP25HSCARRIER MM# 99AKCJ UPC 00735858471596 EAN 5032037210034 MOQ 8</p>	<p><u>Product type:</u> 1U / 2U Accessory / Spare</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> The mounting drive rail is used to insert and extract a 2.5" SSD from the front drive bay of the Intel® Server Systems M50FCP1UR and M50FCP2UR. With no SSD installed, the mounting drive rail must be populated with a drive blank to meet the airflow specifications of the system.</p> <p>This kit is offered as one of several required accessory kits for the Intel® Server Systems M50FCP1UR and M50FCP2UR when looking to upgrade the front drive bay.</p> <p><u>Each kit includes:</u> (8) –2.5" SSD drive mounting rails plus drive extraction lever (8) –2.5" SSD drive blank</p>
<p>3.5" Drive Carrier 2U System</p> 	<p>iPC FXX35HSCAR2 MM# 958245 UPC 00735858345675 EAN 5032037106160 MOQ 1</p>	<p><u>Product type:</u> Accessory / Spare</p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP2UR <p><u>Product overview:</u> Spare 3.5" toolless drive hot-swap drive carrier</p> <p><u>Kit includes:</u> (1) –3.5" toolless drive hot-swap drive carrier with mounting screws for mounting 2.5" SSDs.</p>

Description / Image	Order Information	Product Information
<p>E1A Processor Carrier Clip Board / 1U / 2U Systems</p> 	<p>iPC AXXSPRXCCCC MM# 99ARX0 UPC 735858518642 EAN 5032037251518 MOQ 2</p>	<p><u>Product type: Accessory/Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p>The processor carrier clip is a component within the processor heat sink module (PHM). It is used to attach the processor to the heat sink before the PHM is installed onto the processor socket on the server board. For the 4th Gen Intel® Xeon® Scalable processors, two types of processor carrier clips are supported.</p> <p>The type of carrier clip used is determined by the processor SKU. The carrier clip type designation (E1A or E1B) is marked on the carrier clip. The type designation for the needed carrier clip is also marked on each processor package.</p> <p><u>Kit includes:</u></p> <p>(2) – E1A processor carrier clip</p>
<p>E1B Processor Carrier Clip Board / 1U / 2U Systems</p> 	<p>iPC AXXSPRMCCCC MM# 99ARX2 UPC 735858518659 EAN 5032037251525 MOQ 2</p>	<p><u>Product type: Accessory/Spare</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server Board M50FCP2SBSTD • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u></p> <p>The processor carrier clip is a component within the PHM. It is used to attach the processor to the heat sink before the PHM is installed onto the processor socket on the server board. For the 4th Gen Intel® Xeon® Scalable processors, two types of processor carrier clips are supported.</p> <p>The type of carrier clip used is determined by the processor SKU. The carrier clip type designation (E1A or E1B) is marked on the carrier clip. The type designation for the needed carrier clip is also marked on each processor package.</p> <p><u>Kit includes:</u></p> <p>(2) – E1B processor carrier clip</p>

Description / Image	Order Information	Product Information
<p style="text-align: center;">Cable Kit 1U / 2U Systems</p> 	<p>CYPCBLCOMMKIT</p> <p>iPC CYPCBLCOMMKIT MM# 99A3P1 UPC 00735858475266 EAN 5032037213219 MOQ 1</p>	<p><u>Product type: Spare FRU</u></p> <p><u>Where used:</u></p> <ul style="list-style-type: none"> • Intel® Server System M50FCP1UR • Intel® Server System M50FCP2UR <p><u>Product overview:</u> Low-cost cable kit. Used in 1U / 2U systems as spare or accessory.</p> <p><u>Kit includes:</u></p> <ul style="list-style-type: none"> (1) – 455/565/720-mm splitter cable, 2U power cable, server board to HSBPs (1, 2, and 3) (2x6 pin to three 2x2 pin) (1) – 445/720-mm splitter cable, 1U / 2U power cable, server board to HSBP (2x3 pin to two 2x2 pin) (1) – 425/660-mm splitter cable, 2U power cable, server board to 3.5"HSBP (2x6 pin to two 2x2 pin) (1) – 598.5-mm cable, front control panel cable for 2U systems (26 pin) (1) – 597.5-mm cable, front control panel cable for 1U systems (26 pin) (1) – 601-mm cable, USB 3.0/2.0 cable for front USB panel (26 pin) for 2U and 1U systems (1) – 250-mm cable, server board I²C connector (left of board) to HSBP (left) I²C connector (5 pin to 5 pin) (1) – 350-mm cable, server board I²C connector (left) to HSBP I²C connector (middle) (5 pin to 5 pin) (1) – 900-mm cable, server board to front control panel / USB panel (26 pin to 26 pin)

Appendix A. Glossary

Term	Definition
BIK	Baseboard in knock-down-kit –integrated system
BOM	Bill of material
CMA	Cable management arm
CRPS	Common redundant power supply
DDDC	Double device data correction
EAN	International Article Number (Barcode)
ECC	Error correcting code
EMI	Electromagnetic interference
Intel® Ethernet FD	Intel® Ethernet Flow Director
FRU	Field replaceable unit
GPGPU	General purpose computing on graphics processing unit
iPC	Intel Product Code – used to identify an orderable Intel product
iPN	Intel Part Number – an internal part number issued to a component within a product bill of material (BOM). Individual Intel part numbers are not orderable unless it is included within an orderable Intel product code (iPC)
JBOD	Just a bunch of drives
L6 BIK	Integrated system with no processors, memory, or storage devices installed
L9 BIK	Integrated system including storage devices, but no processors or memory
KDK	Knock-down-kit (chassis only product)
KVM	Keyboard, video, mouse
MM#	Main material order number - used to identify an orderable Intel product
MOQ	Minimum order quantity
NVMe*	NVM Express* – based on Non-Volatile Memory Host Controller Interface Specification (NVMHCI)
ODD	Optical disk drive
Intel® OP HFI	Intel® Omni-Path Host Fabric Interface
Optional Accessory	Hardware that can be added to the system to enhance the default feature set of the shipping configuration
PCBA	Printed circuit board assembly
POST	Power-on self-test
QSFP	Quad small form factor pluggable
RAID	Redundant array of independent drives
RDC	Resource & Documentation Center
Required Option	Hardware that must be added to the shipping configuration for the system to operate
RMFBU	RAID maintenance free backup unit

Term	Definition
ROC	RAID on Chip
RA	Right angle cable connector position
RRA	Reverse right angle cable connector position
SAS	Serial Attached SCSI
SATA	Serial ATA
SFF NVMe*	NVMe SSD in a 2.5" form factor
SFF	Small form factor
SFP	Small form factor pluggable
SKU	Stock keeping unit
SSD	Solid state drive
TPM	Trusted platform manager
UPC	Universal product code (barcode)
VT	Vertical connector position (also known as horizontal, straight)
Intel® VCA	Intel® Visual Compute Accelerator
PCN	Product change notification