



PRODUCT BRIEF | SAS-4 High Density, 102 LFF drives, High Availability JBOD

VDS41022

Enterprise Class High Density 102 drive High Availability JBOD

Viking Enterprise Solutions' VDS41022 JBOD enclosure is a high-density SAS-4 data storage solution that packages 102, 3.5-inch HDDs running at 12 Gb/s SAS with two active 24 Gb/s I/O modules. The VDS41022 JBOD enclosure offers best in-class performance and capacity, space-saving density, "green" energy efficiency, and high-availability of all active components. The VDS41022, with its CMA (cable management arm), fits into an industry standard 19-inch, 1.0 meter deep rack.

Applications Use Cases

The VDS41022 JBOD Enclosure was designed to enable vertical scaling of storage capacity in order to match the needs of a wide range of enterprise-grade storage applications requiring full redundancy. The VDS41022 enables the expansion of external storage in file, block and object storage format through a standard SAS-4 24Gb/s interface between the JBOD and any standard storage server. The VDS41022 provides leading-edge density, capacity, \$/GB, and offers a reduced footprint for even the largest of today's most demanding data centers.

FEATURES

- ▶ Dual I/O modules provide the ability for true failover when the functional IOM is programmed to see all drives.
- ▶ Multiple drive partitioning/split bus zoning configurations
- ▶ Hot-pluggable I/O controllers, fan modules and redundant, high-efficiency, advanced power modules and 5V regulators
- ▶ Four 4-wide mini-SAS HD host or expansion ports per I/O module
- ▶ Modular design increases product configuration flexibility
- ▶ Standard chassis customization & branding available
- ▶ SAS point-to-point connectivity isolates drive failures, increasing reliability and fault tolerance, while improving performance
- ▶ SAS daisy-chain expansion to additional storage arrays and other SFF-8644 SAS compliant host/expansion ports
- ▶ Single SAS 4.0 I/O module configuration is available, featuring four 4-wide, 24 Gb/s mini SAS HD ports and support for 12 Gb/s-6 Gb/s SAS and 6 Gb/s SATA drives.

The VES Advantage


VES offers a broad portfolio of product offerings, including:
Leading edge performance SSD arrays, supporting SAS and NVMe technologies
Leading edge high performance and high availability solutions
Industry leading cold storage and object storage solutions
Purpose-built compute and storage platforms

VES provides an accelerated time-to-market server and product needs, providing the opportunity to leverage a best-in-class portfolio of proven product designs.

Customers can rely on our industry-leading design team and a world class electronics manufacturing services organization.

Provides exceptional performance, scalability and thermal management for today's high density storage environments.

High density SAS-4 JBOD, with 12 Gb/s connection to 102 LFF drives and 24 GB/s SAS-4 to rear mini-SAS I/O in a 4U design.

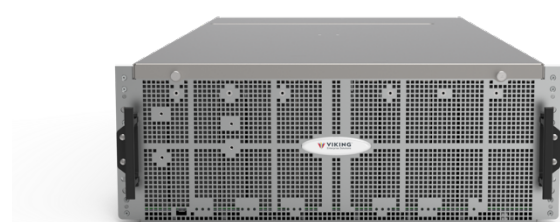

PRODUCT BRIEF | SAS-4 High Density, 102 LFF drives, High Availability JBOD

VDS41022

AC Power

- ▶ Input voltage 200-240V AC
- ▶ Input frequency: 50-60 Hz
- ▶ Power supplies: 2 (n+1)
- ▶ Input current: 9.4 amps max @ 200V AC per power supply
- ▶ Maximum system continuous DC output power rating: 1600W

Hot-swappable Components

- ▶ Two JBOD IO modules
- ▶ Two AC to DC power modules
 - ▶ Two 1600W power supplies
 - ▶ Two +5V regulators per enclosure/system provide hard drive power
- ▶ Two independent AC power inputs
- ▶ Up to 102 drives in the main bay

Firmware

- ▶ SCSI enclosure services (SES) 3.0-based firmware

Drive Partitioning/ Split Bus Zoning

- ▶ Drive array can be zoned in four pre-defined zoning configurations supported by the I/O modules
- ▶ Additional zoning configurations can be developed upon request

Capacity

- ▶ 102-drive capacity per 4U enclosure
 - ▶ 102 drive slots compatible with LFF or SFF drives
 - ▶ 12Gb/s supported on all drive slots

Failure Notifications

- ▶ SCSI enclosure services (SES-3.0) over in-band interface and via system status and FRU LEDs

Host Expansion Interfaces

- ▶ Two SAS JBOD I/O modules, each with 4-wide, 24 Gb/s mini SAS HD expansion ports

Operating Environment

- ▶ Temperature: 5° to 35°C
- ▶ Relative humidity: 20% to 80% (non-condensing)
- ▶ Altitude: -200 ft to 10,000 ft
- ▶ Shock: 3.5G at 11ms, half sine wave pulse
- ▶ Vibration: 0.10G at 5 Hz to 500 Hz
- ▶ Acoustics (declared sound power): 92 dB with I/O modules; at idle/active operation tested to ISO 7779

Non-operating Environment

- ▶ Temperature: 5°C to 45°C
- ▶ Relative humidity: 10% to 90% (non-condensing)
- ▶ Altitude: -200 ft to 10,000 ft
- ▶ Shock: 7G at 11ms, 1/2 sine wave pulse
- ▶ Vibration: 3G at 5 Hz to 500 Hz

Disk Drives

- ▶ Form factor: 3.5-inch HDDs or 2.5-inch SSD SAS drives
- ▶ Interface: 12Gb/6Gb SAS; 6Gb SATA
- ▶ 10W per drive

Safety Standards

- ▶ UL 60950
- ▶ CSA 22.2-950

Quality Standards

- ▶ Manufactured under an ISO 9002 quality system

Environment Protection

- ▶ RoHS & WEEE compliant

4U Rackmount Enclosure

- ▶ Dimensions: 6.9 in. H X 17.2 in. W X 39.4 in. D (17.2 cm H X 43.8 cm W X 100.0 cm D)
- ▶ Weight with drives: 275.0 lbs (124.7 kg) max
- ▶ Standard rackmount rail kit with optional cable management system

Electromagnetic Emissions & Immunity Standards

- ▶ CE Mark
- ▶ EN55022: 2010
- ▶ EN61000 3-2:2014
- ▶ EN61000 3-2:2013
- ▶ FCC Class A
- ▶ Canadian IECS-003

Monitoring & Reporting

- ▶ Monitors temperature, power, cooling (including fan speed control), disk drives, and I/O modules
- ▶ In-band reporting of all FRU and chassis serial numbers, part numbers and revisions



For price, availability and sales information, please email us at sales@vikingenterprise.com or call us at +1 (408) 964-3730.

www.vikingenterprisesolutions.com

Copyright © 2021 Viking Enterprise Solutions, all rights reserved.